




CHIEFTAIN

G1478 Stockpot Stove

Key features

- Powerful double ring concentric burner
 - Flexible control from fast boil to gentle simmer
- Vitreous enamelled cast iron hob
 - Robust and hard wearing
- Removable cast iron pan support
 - Easy to remove and clean
- Heavy gauge tubular legs
 - Supports up to 40kg of weight
- Single control knob operation
 - Simple to use

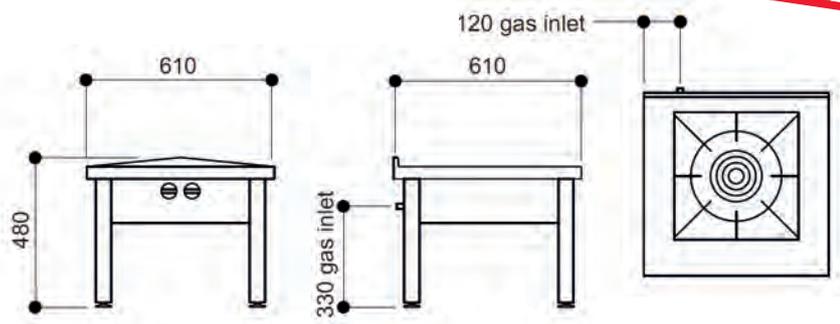

Specification details

Total rating (natural and propane - kW - Nett)	14.6
Total rating (natural and propane - btu/hr - gross)	49,820
Inlet size (natural and propane)	1/2" BSP
Flow rate - natural (m ³ /hr)	1.55
Flow rate - propane (kg/hr)	1.14
Inlet pressure (natural and propane - mbar)	20 / 37
Operating pressure (natural and propane - mbar)	15 / 35
Weight (kg)	40
Packed weight (kg)	
Packed dimensions (w x d x h - mm)	1000 x 1000 x 1100
GTIN number - Nat Gas	
GTIN number - LPG	

Installation notes

Adequate ventilation must be provided to supply sufficient fresh air for combustion and to allow easy removal of any such products that may present a risk to health. Please consult current legislation for details that relate to specific locations. Install unit on a level, fireproof surface in a well-lit, draught free position. If floor is made of a combustible material, local fire requirements must be checked to ensure compliance.

A clearance of 150mm between appliance and any combustible wall and a minimum vertical clearance of 1220mm above top edge of flue should be observed from any wall or object liable to damage from overheating. Minimum vertical clearance of 550mm in still air above flue top edge is necessary to ensure overlying surfaces do not overheat. Minimum clearance of 400mm from any adjacent wall at RH side is needed to allow removal of panel for servicing. LH side will become very hot. Position to minimise risk of accidental touching. Unit can be also mounted upon non-combustible bench legs, floor stand or wall brackets, never directly upon a table top.