



DOMINATOR*PLUS*

User, installation, and servicing instructions

INDUCTION SOLIDTOP COUNTERTOP

E39071

Read these instructions before use

DATE PURCHASED:

MODEL NUMBER:

SERIAL NUMBER:

DEALER:

SERVICE PROVIDER:

T101075

Rev No 3
Published: 30/10/2023

Dear Customer

Thank you for choosing Falcon Foodservice Equipment.

This manual can be downloaded from www.falconfoodservice.com or scan here:



IMPORTANT: Please keep this manual for future reference.

Falcon Foodservice Equipment

HEAD OFFICE

Wallace View, Hillfoots Road, Stirling. FK9 5PY. Scotland.

PREVENTATIVE MAINTENANCE CONTRACT

To obtain maximum performance from this unit regular servicing of the appliance should be undertaken to ensure correct operation, it is functioning as intended, and safe to use. We recommend servicing in accordance with SFG20 Maintenance Schedules and as a minimum, after 2,500 hours of use, or annually, whichever comes first and that a maintenance contract be arranged with an appointed service contact. Visits may then be made at agreed intervals to carry out adjustments and repairs.



WEEE Directive Registration No. WEEE/DC0059TT/PRO

At end of appliance life, dispose of appliance and any replacement parts in a safe manner, via a licensed waste handler. Appliances are designed to be dismantled easily and recycling of all material is encouraged whenever practicable.

CONTENTS

1.0	SYMBOLS	1
2.0	SAFETY GUIDANCE	2
2.1	GENERAL SAFETY	2
2.2	INSTALLATION SAFETY	4
2.3	ELECTRICAL SAFETY	4
2.4	FIRE SAFETY	5
2.5	MAINTENANCE SAFETY	6
3.0	APPLIANCE INFORMATION	8
4.0	OPERATION	9
4.1	COMPONENT PARTS.....	10
4.2	CONTROLS.....	11
4.3	USING THE APPLIANCE	12
4.4	DO NOT PLACE POT OR PAN OVER DIGITAL DISPLAY	13
4.5	WARNING WHEN USING MULTIPLE PANS ON THE SAME HOB.....	13
4.6	BUZZING NOISE OR TONE WHEN IN OPERATION	13
4.7	HOB COOKING ZONE ENERGY LAYOUT	14
4.8	HOB SETTINGS 1-9.....	15
4.9	PAN DETECTION.....	15
4.10	HIGH HEATSINK TEMPERATURE	15
4.11	DIGITAL DISPLAY CODES.....	15
4.12	HOW TO OPERATE.....	16
4.13	USEFUL CULINARY TIPS	16
4.14	CHEF INDUCTION TOP SETTINGS RECOMMENDATIONS:	16
4.15	THE DO NOT'S AND THE DO'S WITH THE APPLIANCE:	17
5.0	CLEANING AND MAINTENANCE	18
5.1	CLEANING	19
5.2	MAINTENANCE.....	20
5.3	MAINTENANCE - COOLING FANS	21
6.0	SPECIFICATION	22
6.1	APPLIANCE WEIGHT TABLE:	22
6.2	ELECTRICAL DATA TABLE:	22
7.0	DIMENSIONS / CONNECTION LOCATIONS	23
8.0	TRANSPORT & INSTALLATION	24
8.1	TRANSPORT & POSITIONING	25

8.2	SITING / CLEARANCES.....	26
8.3	ELECTRIC SUPPLY & CONNECTION.....	27
8.4	COMMISSIONING.....	29
8.5	INSTRUCTION TO USER.....	29
9.0	SERVICING	30
9.1	CONTROL PANEL REMOVAL	30
9.2	REAR FAN COVER REMOVAL.....	30
9.3	FUSE REMOVAL.....	31
9.4	CONTROL SWITCHES REMOVAL	32
9.5	HOB COOLING THERMOSTAT REMOVAL.....	32
9.6	FRONT COOLING FAN REMOVAL.....	33
9.7	RELEASE & OPEN HOB	35
9.8	LED DIGITAL DISPLAY PCB REPLACEMENT	36
9.9	DISCONNECT GENERATOR POWER CABLES	37
9.10	DISCONNECT COIL POWER CABLES	37
9.11	MEMORY STICK REMOVAL	39
9.12	GENERATOR REMOVAL	40
9.13	INDUCTION HEATER COILS REMOVAL	42
9.14	REAR COOLING FAN REMOVAL.....	43
9.15	CAPICTOR REMOVAL	44
9.16	CIRCUIT DIAGRAMS.....	45
9.17	WIRING DIAGRAMS.....	46
10.0	ACCESSORIES	50
10.1	ENERGY OPTIMIZATION KIT (DIN 18875)	50
11.0	FAULT FINDING.....	51
11.1	ERROR CODES.....	51
12.0	SPARE PARTS.....	56
13.0	SERVICE INFORMATION.....	57

1.0 SYMBOLS



WARNING



RISK OF SHOCK



RISK OF FIRE



**NON-IONISING
ELECTROMAGNETIC
RADIATION**



SCREWDRIVER



SPANNER



SOCKET

2.0 SAFETY GUIDANCE

2.1 GENERAL SAFETY



2.1.1 These instructions are only valid if the country code appears on the appliance. If the code does not appear on the appliance, refer to the technical instructions for adapting the appliance to the conditions for use in that country.

2.1.2 These appliances have been UKCA/CE-marked based on compliance with the Gas Appliance Regulations/Product Safety and Metrology Regulations, Electrical and Electromagnetic Compatibility (EMC) Regulations/Directives for the Countries, Gas Types and Pressures as stated on the data plate.



2.1.3 This equipment is for professional use only and must be used by qualified persons.

2.1.4 Never leave this appliance unsupervised when in use and always turn equipment off at the end of service.



2.1.5 The installer must instruct the responsible person(s) or user(s) of the correct operation and maintenance of the appliance.

2.1.6 Check that no damage has occurred to the appliance or supply cord during transit. If damage has occurred, do not use this appliance and report immediately to the installer or dealer.



2.1.7 If fitted to the appliance, ensure the supply cord is routed free from the appliance to avoid damage.



2.1.8 Training and Competence: To help ensure the safe use of this appliance there is a requirement for you to provide whatever information, instruction, training, and supervision as is necessary to ensure, so far as is reasonably practicable, the health and safety of all users.

2.1.9 For further help and information on training and competence we refer you to the Health & Safety Executive website; www.hse.gov.uk document ref: health and safety training INDG345. International customers should default to the health and safety guidelines provided by your government body.



2.1.10 Risk Assessment: As part of managing the health and safety of your business you must control any risks identified in your commercial kitchen. To do this you need to think about what might cause harm to people and decide whether you are taking reasonable steps to prevent that harm. This is known as risk assessment. It is important to consider the environment around the product as well as the product itself. For example, oil or food spills will present a significant risk so users so the need to immediately clean up such spills must be reflected in staff training.

2.1.11 Record the training that you provide and support it by providing safe system of work (SSOW) documents that set out procedures to be followed for potentially hazardous tasks.

2.1.12 For further help and information on risk assessments we would refer you to you the Health and Safety Executive website; www.hse.gov.uk document ref: risk assessment INDG163. International customers should default to the health and safety guidelines provided by your government body.

2.2 INSTALLATION SAFETY



- 2.2.1 Installation must meet national or local regulations. Attention must be paid to safety (installation & use) regulations, health and safety at work act, local and national building regulations, fire precautions act.
- 2.2.2 The installer must instruct the responsible person(s) of the correct operation and maintenance of the appliance.
- 2.2.3 Put a documented system in place for periodic inspections, testing and maintenance of our gas/ electrical appliances. Check that the fixed electrical installation has been inspected and tested by a competent electrical contractor (e.g., NICEIC-approved or ECA member) as prescribed in BS7671, within the last 5 years.

2.3 ELECTRICAL SAFETY



- 2.3.1 To prevent shocks, this appliance must be earthed.
- 2.3.2 This unit is fitted with an equipotential connection at the rear on the base.
- 2.3.3 Before attempting any maintenance or end of service cleaning, isolate the appliance at the mains switch and take steps to ensure that it is not inadvertently switched on.
- 2.3.4 We recommend, Supplementary electrical protection with the use of a type B+ residual current device (RCD).
- 2.3.5 Fixed wiring appliances incorporate a locally situated switch disconnecter.
- 2.3.6 to connect to, which is easily accessible for switching off and safe isolation purposes. The switch disconnecter must meet the specification requirements of IEC 60947.

2.4 FIRE SAFETY



OPERATOR COMPETENCY AND TRAINING

- 2.4.1 Ensure you are trained in the safe and proper use of the Induction Range and know how to turn it off and switch the power off at the mains.
- 2.4.2 Ensure you are familiar with the kitchen fire safety procedures and the location and proper use of correct fire safety equipment.

CLEANING

- 2.4.3 Ensure that the appliance is regularly cleaned (either daily or as and when required dependant on usage and cooking related activities). It must be serviced and maintained by a qualified and competent service provider, and there is enough room around the appliance to do so.
- 2.4.4 Additionally ensure that the appliance, surrounding work area and extraction system are regularly cleaned, (at least weekly) to avoid the build-up of fats oils and grease that could present a fire risk. A deep clean should be undertaken at least every 6 months by a specialist contractor.

ELECTRICAL ISOLATION POINTS

- 2.4.5 Ensure any separate electric switches provided for cooking equipment and/or extractor fans are accessible and clearly labelled.

CARE AND MAINTENANCE OF THERMAL AND OPERATIONAL SAFETY DEVICES

- 2.4.6 Your oven is fitted with a thermal safety device. This will stop the heating of the oven chamber if it becomes overheated. This appliance will always fail safe so long as there is no damage to the thermal safety device.



- 2.4.7 Failure to clean and check the safety and operational thermostats can impact the performance of the appliance and increase the risk of an appliance fire.
- 2.4.8 Damage to the thermostat sensors or their capillaries can increase the risk of overheating or fire.
- 2.4.9 Do not operate the oven if the safety devices located within the fryer pan appear to be dislodged or damaged.

2.5 MAINTENANCE SAFETY



2.5.1 Unless otherwise stated, parts which have been protected by the manufacturer must not be adjusted by the installer or end user.



2.5.2 Before any cleaning is undertaken, isolate appliance from mains power supply at isolator switch.

2.5.3 Suitable protective clothing must be worn when cleaning this appliance.

2.5.4 The appliance should never be cleaned with a jet of water or steam cleaned. Do not use acid or halogen-based (e.g., chlorine) descaling liquids, flammable liquids, cleaning aids or cleaning powders.

2.5.5 Failure due to lack of proper cleaning is not covered by warranty.

2.5.6 Particular attention must be paid to cleaning the Thermostat bulb & Capillaries.



2.5.7 Take care when cleaning not to dislodge or damage the safety and operational thermostat sensors mounted on the right-hand side of the oven chamber.



2.5.8 If the thermostats or capillaries are damaged, then do not turn the appliance on and contact Falcon or you approved service provider to undertake the necessary repairs.

2.5.9 To obtain maximum performance from this unit regular servicing of the appliance should be undertaken to ensure correct operation, it is functioning as intended, and safe to use. We recommend servicing in accordance with SFG20 Maintenance Schedules and as a minimum, after 2,500 hours of use, or annually, whichever comes first and that a maintenance contract be arranged with an appointed service contact. Visits may then be made at agreed intervals to carry out adjustments and repairs.



2.5.10 During Servicing of the appliance, where applicable, please ensure seals are checked. If the integrity of the seal is compromised, it must be replaced

IMPORTANT INFORMATION

ELECTRICAL SAFETY AND ADVICE REGARDING SUPPLEMENTARY ELECTRICAL PROTECTION

Commercial kitchens and foodservice areas are environments where electrical appliances may be located close to liquids or operate in and around damp conditions or where restricted movement for installation and service is evident.

The installation and periodic inspection of the appliance should only be undertaken by a qualified, skilled, and competent electrician; and connected to the correct power supply suitable for the load as stipulated by the appliance data label.

The electrical installation and connections should meet the necessary requirements to the local electrical wiring regulations and any electrical safety guidelines.

We recommend: -

- Supplementary electrical protection with the use of a type B+ residual current device (RCD)
- Fixed wiring appliances incorporate a locally situated switch disconnecter to connect to, which is easily accessible for switching off and safe isolation purposes. The switch disconnecter must meet the specification requirements of IEC 60947.

Your attention is drawn to: -

BS 7671:2018—Guidance Note 8 - 8.13: Other locations of increased risk.

It is recognized that there may be locations of increased risk of electric shock other than those specifically addressed in Part 7 of BS 7671. Examples of such locations could include laundries where there are washing and drying machines in proximity and water is present, and commercial kitchens with stainless steel units, where once again, water is present.

Where because of the perception of additional risks being likely, the installation designer decides that an installation or location warrants further protective measures, the options available include:

- Automatic Disconnection of Supply (ADS) by means of a residual current device having a residual operating current not exceeding 30mA.
- Supplementary protective equipotential bonding; and
- Reduction of maximum fault clearance time.

The provision of RCDs and supplementary bonding must be specified by the host organization's appointed installation designer or electrical contractor and installed by a suitably qualified and competent electrician so as to comply with Regulations 419.2 and 544.2

3.0 APPLIANCE INFORMATION

These appliances have been UKCA/CE-marked based on compliance with the Gas Appliance Regulations/Product Safety and Metrology Regulations for the Countries, Gas Types and Pressures as stated on the data plate.


 Falcon Foodservice Equipment	STD	MODEL	SERIAL NO.	GAS TYPE		
	SUPPLY PRESS - mbar	COUNTRY	PIN/CE	CAT		
	CE	UK CA	IP RATING			
	INJECTOR MARKING	HEAT INPUT	- kW	GAS RATE	ADJ PRESS - mbar	
			- kW	- m ³ /h	SET PRESS OVEN - mbar	
			- kW	- kg/h	SET PRESS BOILER - mbar	
	RATED ELECTRIC INPUT		kW	VOLTS	OUTPUT FREQ kHz	EXT FUSE - A
	PHASE LOADING	L1	L2	L3	Hz	INT FUSE A

- A - Serial No
- B - Model No
- C- Gas Category
- D – Supply Pressure
- E- Gas Type
- F - Gas Rate
- G - Total Heat Input
- H- Total Electrical Power
- I - Electrical Rating
- J - Magnetic Field Frequency
- K - Electrical Phase Loading
- L- Adjusted Gas Pressure

4.0 OPERATION


	<p>IF GLASS-CERAMIC TOP IS CRACKED OR BROKEN IMMEDIATELY DISCONNECT APPLIANCE FROM POWER SUPPLY AND CONTACT YOUR SERVICE AGENT.</p> <p>THE AIR INTAKE FILTERS MUST BE IN POSITION DURING OPERATION IT SHOULD BE CLEANED REGULARLY AND DO NOT OBSTRUCT AIR FILTER ENTRY BELOW.</p>
	<p>USERS MUST BE MADE AWARE THAT INDIVIDUALS FITTED WITH A PACEMAKER SHOULD CONSULT THEIR DOCTOR IF IN A CLOSE PROXIMITY TO THIS UNIT. THIS INDUCTION UNIT EMANATES AN 18 KHz TO 25 KHz OUTPUT THAT MAY AFFECT OLDER TYPES OF PACEMAKER.</p> <p>USERS MUST ALSO BE AWARE THAT INDIVIDUALS FITTED WITH An INSULIN PUMP SHOULD CONSULT THEIR INSULIN PUMP MANUFACTURE AND DOCTOR IF IN A CLOSE PROXIMITY TO THIS UNIT. THIS INDUCTION UNIT EMANATES AN 18 KHz TO 25 KHz OUTPUT THAT MAY AFFECT SOME TYPES OF INSULIN PUMPS.</p>
	<p>USE OF THE CORRECT TYPE OF PAN IS ESSENTIAL FOR CORRECT OPERATION.</p> <p>DO NOT PLACE ANY METAL OBJECTS, SUCH AS KITCHEN UTENSILS, CUTLERY, ALUMINIUM FOIL, OR PLASTIC VESSELS, ON THE GLASS CERAMIC TOP.</p> <p>THE USER MUST ALSO BE AWARE OF POTENTIAL TO HEAT JEWELLERY AND DISRUPT ELECTRONIC EQUIPMENT PLACED OVER THE INDUCTION ZONES MAGNETIC FIELD.</p> <p>DO NOT PLACE CREDIT CARDS, ETC, ON THE GLASS-CERAMIC TOP AS DATA COULD BE WIPED OFF.</p> <p>NEVER LEAVE THE INDUCTION HOB UNSUPERVISED WHEN IN USE. THE GLASS-CERAMIC TOP MUST NOT BE USED FOR STORAGE.</p> <p>DAMAGED PANS CAN REDUCE APPLIANCE EFFICIENCY.</p> <p>WARPED OR POOR CONDITION PANS OR POTS WILL POTENTIALLY CAUSE DAMAGE TO CERAMIC GLASS AND ZONE MARKERS.</p> <p>DO NOT USE SIZZLER PLATES ON HOB AS IT CAN POTENTIALLY DAMAGE GLASS.</p>

4.1 COMPONENT PARTS

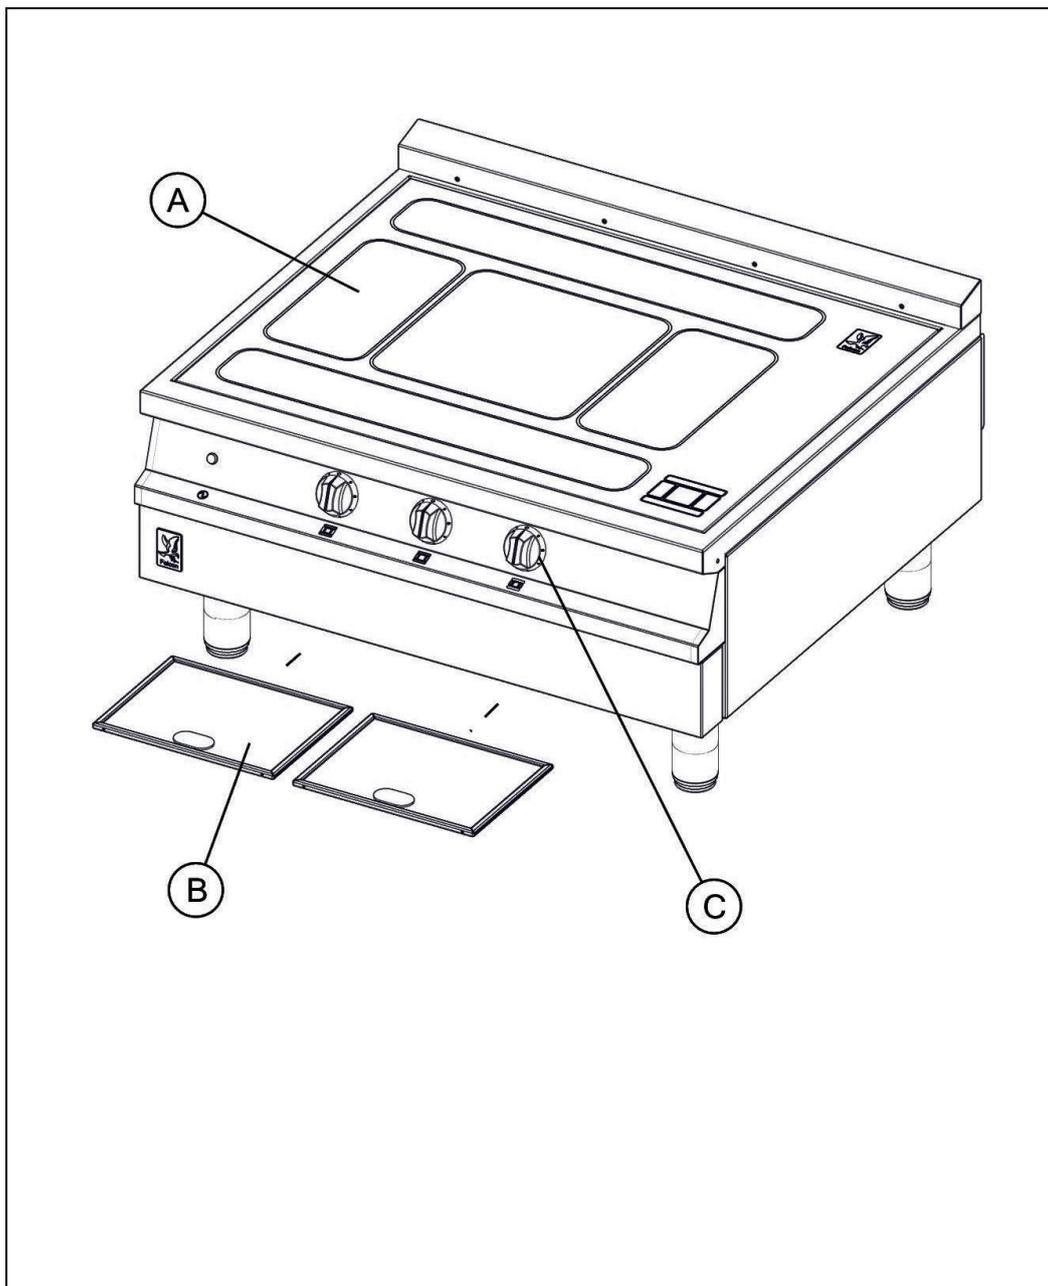

- A - Glass Hob
- B - Filter
- C - Hob Zone Control Switch

4.2 CONTROLS

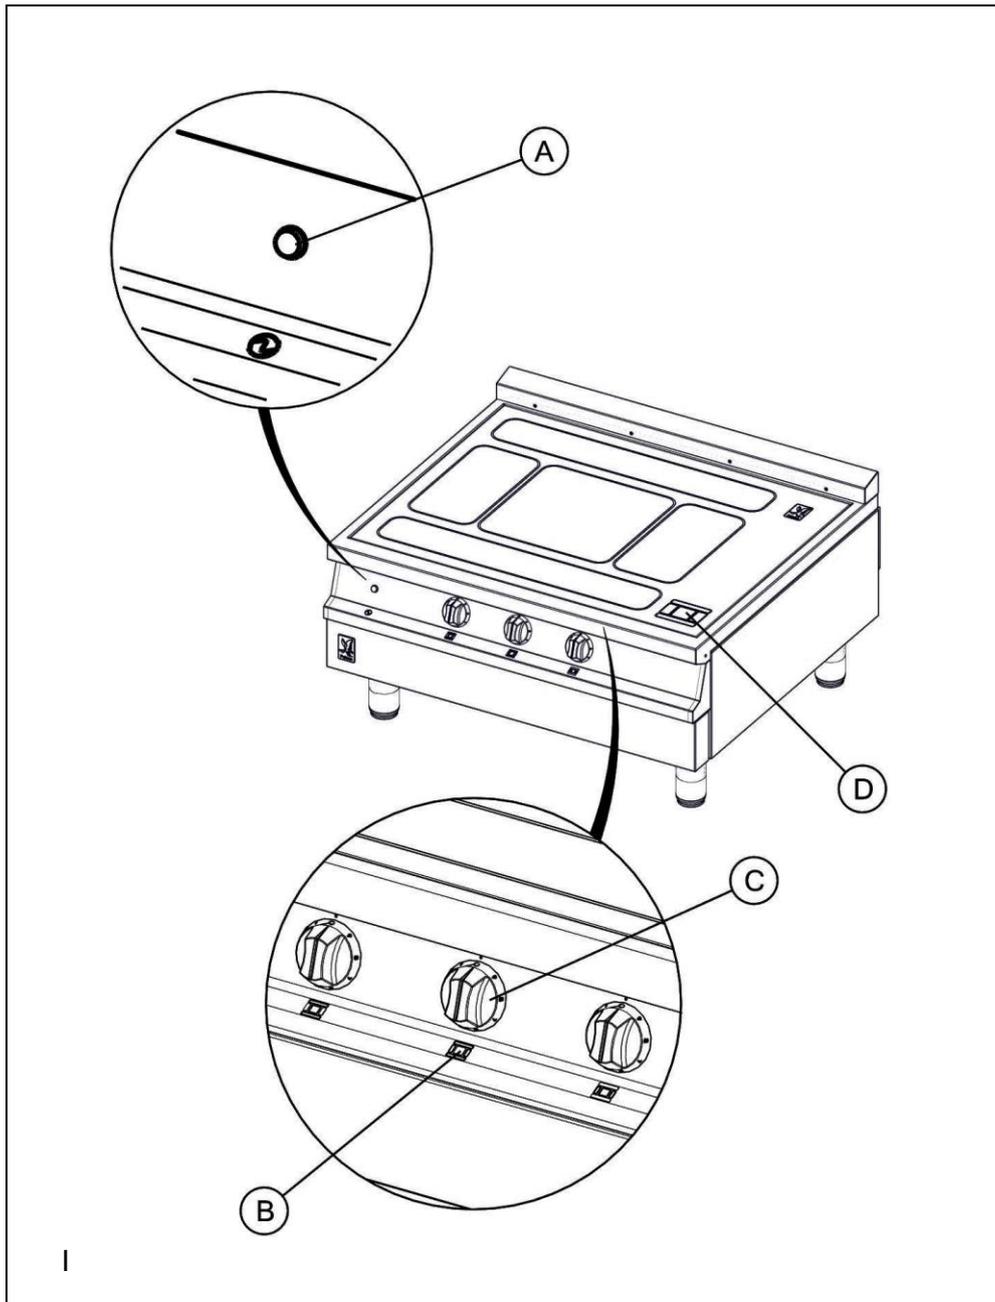


- A - Power neon (red)
- B - Induction zone indicator
- C - Induction control switch
- D - Induction zone digital display

4.3 USING THE APPLIANCE


4.3.1 Ensure you use the correct size of pot for each zone. Recommended pot sizes are in the images below.

Front and rear zone

<Ø120

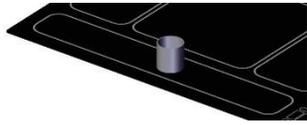


Ø120 – Ø250

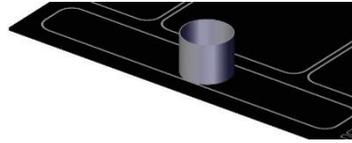


Centre zone

<Ø120

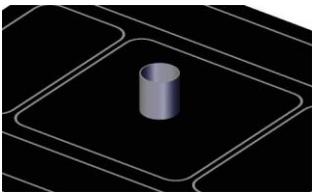


Ø120 – Ø300




Left hand and right-hand zone.



<Ø120

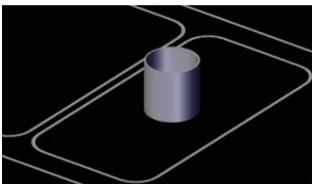

Ø120 – Ø250




4.3.2 Ensure you use the correct type of pot.

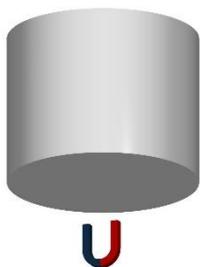


*

4.3.3 Ensure you use a clean flat bottom pan.

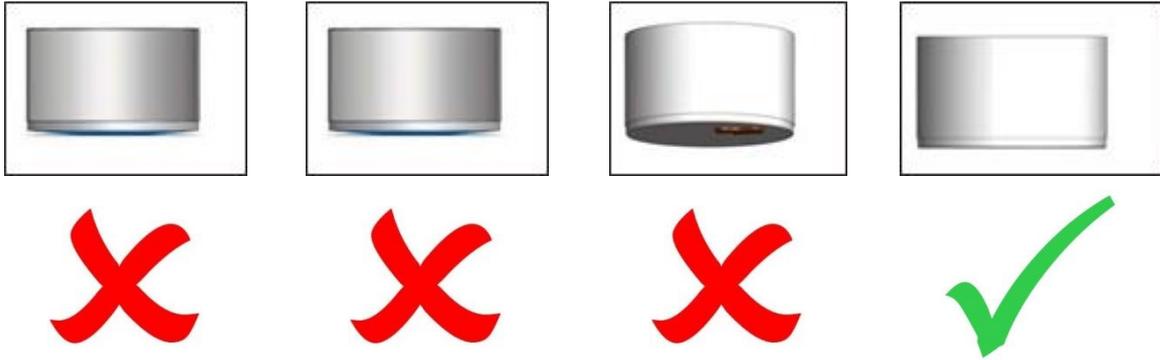


4.4 DO NOT PLACE POT OR PAN OVER DIGITAL DISPLAY

4.4.1 This can result on digital display overheating.

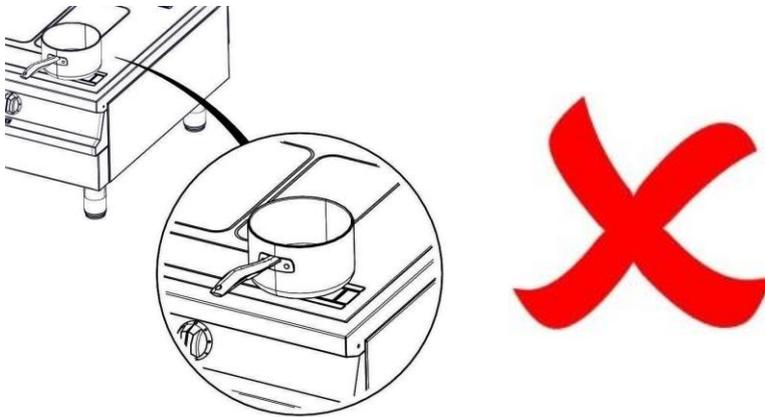

4.5 WARNING WHEN USING MULTIPLE PANS ON THE SAME HOB

4.5.1 Do not allow pans to touch each whilst in use. Pans contacting each can result stray electrical flows:

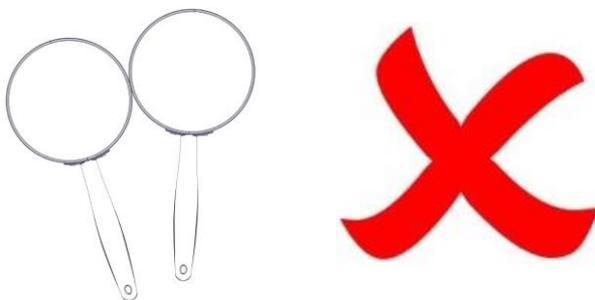


4.6 BUZZING NOISE OR TONE WHEN IN OPERATION

When using large empty pans that straddle multiple zones, you may experience a buzzing noise/tone coming from the hob. This noise can be worse when using high power settings. To reduce the noise, lower the power setting.

4.7 HOB COOKING ZONE ENERGY LAYOUT

Each zone has a different maximum power availability. See below diagram of layout:

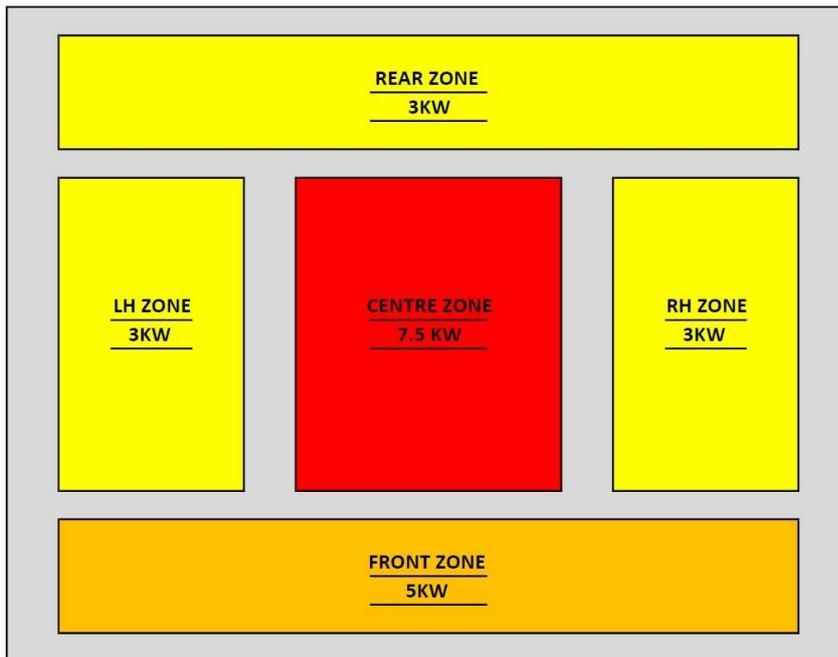

For example: When boiling we recommend using the centre zone and once boiled move pot to rear or side zone to maintain a simmer.

4.8 HOB SETTINGS 1-9

4.8.1 Each cooking zone is controlled by a marked, variable control from 1 (lowest) to 9 (highest).

4.9 PAN DETECTION

4.9.1 This prevents the zones being turned on without a pan being present. It also switches the zone off as soon as a pan is removed.

Also, if the pan is made from the wrong type of material for induction equipment the digital display will read the no pan present symbol on the glass.

4.10 HIGH HEATSINK TEMPERATURE

4.10.1 Occurs when the temperature of the heatsink in the generator goes above 75°C. An 'F' symbol will be displayed and the power output from the device will be limited. This can be caused by insufficient airflow to the generators. Do not switch off the appliance and allow cooling to occur. When the 'F' symbol disappears either continue operation or switch off the appliance. If problem, persist remove and clean air-filters as per section 5.1.

4.11 DIGITAL DISPLAY CODES

	Power level settings (1-9)
	Protection of restart after disruption of current
	High heat sink temperature
	Phase failure
	Reduction of performance
	Pan detection (no pan present).
	Error codes for generator.

4.12 HOW TO OPERATE

4.12.1 To adjust settings, turn the control switch clockwise and select your preference incrementally.

Note: As per solid top the centre zone or “bullseye” has the strongest output. Moving towards the sides, rear and front the output decreases. These zones do not deliver the same power output as the centre. See section 4.7 for diagram of hob energy layout for reference.

4.12.2 Refer to the display screen and control dials for preferred settings and performance.

4.12.3 Multiple pans can be used across all zones. Refer to sections 4.3, 4.4 and 4.5 for further important guidance.

4.13 USEFUL CULINARY TIPS

- For best performance output, use the appropriate size of pot or pan referenced to each zone.
- The more populated a zone is, the more energy will be allocated to that zone.
- Examples 1: a large pot is more efficient on the central zone than a small pot.
- Examples 2: multiple small pots or pans on the central zone will draw more energy.
- Examples 3: small single pots or pans on front, rear and side zones will draw less energy with lighter performance output.
- Populating with additional pots or pans will improve performance.
- Preset the control dials to match your current requirements.
- For cleaning the hob, best practice is to use a luke warm dampened microfibre towel with little sink dishwash detergent.

4.14 CHEF INDUCTION TOP SETTINGS RECOMMENDATIONS:

Process	Central Zone Setting	Left Right Zone setting	Front Rear Zone setting
Bulk Food Preparation	8	6	7
A la carte service	7	9	8
Set menu	8	8	9
Basic menu prep	7	7	6
Light menu prep	6	6	5
Rapid boil	8	-	-
Robust strong boil (not continuous)	9	-	-
Soft boil / strong simmer	7	7 – 9	7 - 9
Simmer	4 – 5	5 – 7	5 – 7
Poaching	5	6	6

4.15 THE DO NOT'S AND THE DO'S WITH THE APPLIANCE:

- Never leave any commercial equipment unattended, whilst operational.
- Take care not to excessively overheat pans and pots beyond 1st smoking point.
- Especially take care with dry pans and pots.
- When sauteing or flash frying, take care with the pan tossing movement and action to avoid glass damage or dropping onto the glass surface.
- It is recommended to lift pans or pots opposed to pushing, pulling, and dragging across the glass.
- Always check your pots and pans for damage, and that the bases are flat, not warped, and free from debris.
- Avoid lifting heavy pots or pans, ask for help.
- When lifting, ensure you have firm grip on handles to avoid accidental dropping.
- Always remove spillages or food debris at the earliest opportunity.
- Never clean the glass hob with strong chemicals, abrasive materials or liquids, acids, or strong detergents.



**DAMAGING THE GLASS:
DO NOT DRAG HEAVY POTS ACROSS THE GLASS SURFACE.
WHEN MOVING LIFT INSTEAD.**

TAKE CARE NOT TO DROP HEAVY ITEMS ON TO GLASS

5.0 CLEANING AND MAINTENANCE

When removing heavy items to aid cleaning or maintenance particular care should be taken. A manual handling risk assessment is the best way to determine the level of risk to anyone using or maintaining this equipment. To help with such an evaluation we have included the weights of individual components that may present significant risk.

For further help and information on manual handling and associated risk assessment we would refer you to you the Health and Safety Executive website; www.hse.gov.uk document ref: manual handling at work INDG143. International customers should default to the health and safety guidelines provided by your government body.

The cleaning of fryers or other products that use hot oil present significant risks to end users and particular care should be taken. Cold water and hot oil for example are an explosive mix and should be avoided at all costs.

Other useful references for health and safety issues

- www.hse.gov.uk
- Essentials of health and safety at work ISBN978
- Noise at work INDG362
- Safe systems of work
- Other notes added to the body of the instructions.

BEFORE ANY CLEANING IS UNDERTAKEN, ISOLATE THE APPLIANCE FROM MAINS POWER SUPPLY AT ISOLATOR SWITCH.



SUITABLE PROTECTIVE CLOTHING MUST BE WORN WHEN CLEANING THIS APPLIANCE.

THE APPLIANCE MUST NOT BE STEAM CLEANED. DO NOT USE ACID OR HALOGEN-BASED (E.G. CHLORINE) DESCALING LIQUIDS, FLAMMABLE LIQUIDS, CLEANING AIDS OR CLEANING POWDERS.

FAILURE DUE TO LACK OF PROPER CLEANING IS NOT COVERED BY WARRANTY.

NOTE: All surfaces are easier to clean if spillages are removed before becoming burnt on, and the appliance is cleaned daily.

It should be noted that certain scouring pads including nylon types can easily mark stainless steel. Care should be exercised during the cleaning process. When rubbing stainless steel with a cloth, always rub in the direction of the grain.

5.1 CLEANING

5.1.1 Switch off appliance and allow appliance to cool down.



CLEAN THE AIR INTAKE FILTERS REGULARLY. FAILURE TO CLEAN THE FILTER REGULARLY MAY CAUSE PROBLEMS THAT WILL NOT BE COVERED BY WARRANTY. FOR GUIDANCE WOULD RECOMMEND WEEKLY CLEANING INCLUDING DAILY INSPECTION TO DETERMINAL THE STATE OF THE FILTERS. THE AIR INTAKE FILTER MUST BE IN PLACE DURING OPERATION.

DO NOT ATTEMPT TO REPAIR OR REPLACE ANY PART OTHER THAN THE AIR INTAKE FILTER. REFER TO THE ERROR CODE LIST TO DEBUG THE PROBLEM.

5.1.2 The air filters are located on the underside of the countertop. It can be removed by sliding from the guides.

5.1.3 Clean using hot soapy water.

5.1.4 Before returning the filters back into position ensure the filters are completely dry.

Note: Periodic cleaning can also be done by using a soft brush & gently brushing the filter to remove any dust and debris that has collected on the filter.

5.1.5 Clean the Ceran-glass hob with hot soapy water and a soft cloth. **DO NOT USE** metal scrapers.



AVOID INTENSE CLEANING OVEN HOB ZONE MARKERS.

5.2 MAINTENANCE

MAINTENANCE CHECK

REGULAR SERVICING OF THE APPLIANCE SHOULD BE UNDERTAKEN TO ENSURE CORRECT OPERATION, IT IS FUNCTIONING AS INTENDED, AND SAFE TO USE. WE RECOMMEND SERVICING AFTER 2,500 HOURS OF USE, OR ANNUALLY, WHICHEVER COMES FIRST.



ANY MAINTENANCE SCHEDULE SHOULD BE CARRIED OUT IN ACCORDANCE WITH SFG20 MAINTENANCE SCHEDULE. SHOULD ANY ISSUES WITH THE INTEGRITY OF THE COMPONENTS BE IDENTIFIED THESE SHOULD BE REPLACED. IF THE APPLIANCE IS NOT CONSIDERED SAFE THE UNIT SHOULD BE REMOVED FROM SERVICE AND THE RESPONSIBLE PERSON ADVISED WHY THE UNIT IS NOT SAFE TO USE AND WHAT REMEDIAL ACTION IS NEEDED. CONTENTS OF THE MAINTENANCE SCHEDULE SHOULD BE AGREED WITH THE MAINTENANCE PROVIDER.

5.3 MAINTENANCE - COOLING FANS

5.3.1 The recommended maintenance schedule for the hob cooling fans is:

Part to check	Type of inspection	Frequency
Protection against accidental contact with fan	Visual	Min ½ yearly
Check fan for damage	Visual	Min ½ yearly
Fan fixed in place correctly	Visual	Min ½ yearly
Fan wires fixed in place	Visual	Min ½ yearly
Fan is earthed correctly	Visual	Min ½ yearly
Insulation of wires	Visual	Min ½ yearly
Check impeller for wear/sediment/corrosion	Visual	Min ½ yearly

6.0 SPECIFICATION

6.1 APPLIANCE WEIGHT TABLE:

APPLIANCE	UNIT WEIGHT (kg)	PACKED WEIGHT (kg)
E39071	95	113

6.2 ELECTRICAL DATA TABLE:



The figures in the table below are based on the maximum theoretical power draw if all zones were covered by pots capable of drawing maximum power.

Power	21.5kW
Supply voltage	400VAC 3ph N
Current per phase	32A
Frequency	50/60Hz



IF ANY CURRENT IS OUT WITH THESE TOLERANCES, THE CAUSE MUST BE INVESTIGATED AND RECTIFIED.

7.0 DIMENSIONS / CONNECTION LOCATIONS

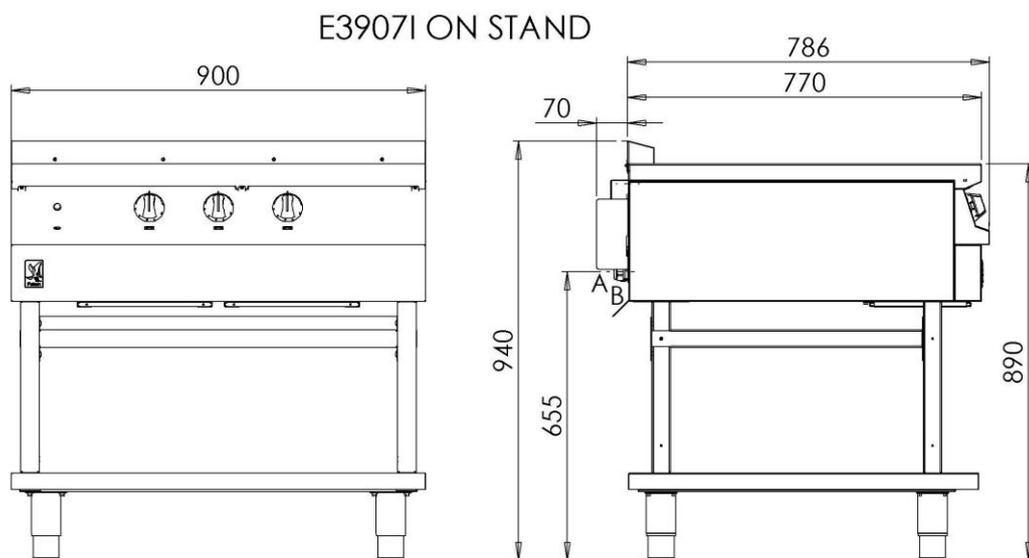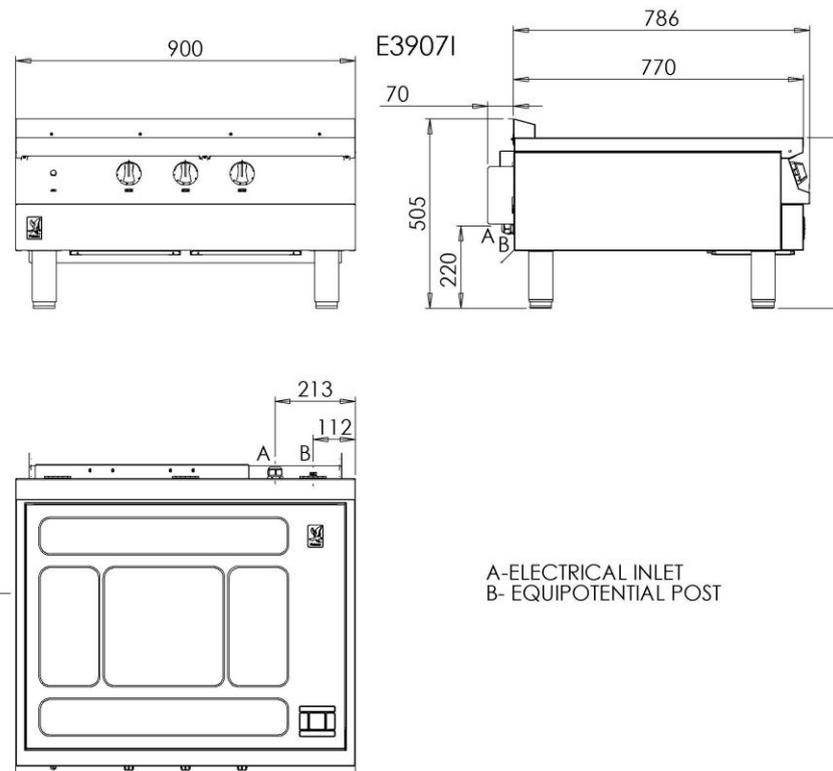

8.0 TRANSPORT & INSTALLATION

ELECTRICAL SAFETY AND ADVICE REGARDING SUPPLEMENTARY ELECTRICAL PROTECTION

Commercial kitchens and foodservice areas are environments where electrical appliances may be located close to liquids or operate in and around damp conditions or where restricted movement for installation and service is evident.

The installation and periodic inspection of the appliance should only be undertaken by a qualified, skilled, and competent electrician; and connected to the correct power supply suitable for the load as stipulated by the appliance data label.

The electrical installation and connections should meet the necessary requirements to the local electrical wiring regulations and any electrical safety guidelines.

We recommend: -

- **Supplementary electrical protection with the use of a residual current device (RCD). If fitting an RCD, ensure it is a type B+ RCD with a minimum residual operating current of 30mA.**
- **Fixed wiring appliances incorporate a locally situated switch disconnector to connect, which is easily accessible for switching off and safe isolation purposes. The switch disconnector must meet the specification requirements of IEC 60947.**

Your attention is drawn to: -

BS 7671:2018–Guidance Note 8 - 8.13: Other locations of increased risk.

It is recognized that there may be locations of increased risk of electric shock other than those specifically addressed in Part 7 of BS 7671. Examples of such locations could include laundries where there are washing and drying machines in proximity and water is present, and commercial kitchens with stainless steel units, where once again, water is present.

Where because of the perception of additional risks being likely, the installation designer decides that an installation or location warrants further protective measures, the options available include:

- Automatic Disconnection of Supply (ADS) by means of a residual current device having a residual operating current not exceeding 30mA;
- Supplementary protective equipotential bonding; and
- Reduction of maximum fault clearance time.

The provision of RCDs and supplementary bonding must be specified by the host organization's appointed installation designer or electrical contractor and installed by a suitably qualified and competent electrician to comply with Regulations 419.2 and 544.2

8.1 TRANSPORT & POSITIONING

GENERAL WARNINGS FOR TRANSPORT:

- 8.1.1 Observe the Maximum load and stacking limits.
- 8.1.2 Follow the indications shown on the packaging, any instructions on the equipment, including those on the points where forklift trucks cannot be used.
- 8.1.3 Danger of crushing during transportation due to the weight of the appliance.
- 8.1.4 Hands and fingers may be crushed.
- 8.1.5 Wear suitable protective clothing when transporting.
- 8.1.6 Danger of overturning during transporting.
- 8.1.7 Danger of crushing due to the appliance overturning on persons.
- 8.1.8 Take care of the centre of gravity of the appliance.
- 8.1.9 Take great care to ensure that the appliance does not overturn during transportation, lifting, and after installation.

Take care of the width and height of accesses during transportation.

Take care not to damage the appliance due to narrow doorways: doorways less than 80cm wide, remove any handles etc.

Check that all the parts of the appliance are intact and have not been damaged during transportation. If damaged due to transportation, inform the specialised reseller/ haulier immediately.

To position the appliance, it is recommended to use the mount offered by the manufacturer, should you want to do things differently, it is necessary to take account of the weight of the appliance.

Before permanently fixing the appliance in position, the Water, Electrical and Gas Connections must be made. (See relative sections).

Once the appliance is installed, the electrical power cable must be protected, and never stretched or tugged.

Remove all packaging materials and peel away the protective plastic film from all external surfaces of the appliance.



UNLESS OTHERWISE STATED, PARTS WHICH HAVE BEEN PROTECTED BY THE MANUFACTURER ARE NOT TO BE ADJUSTED BY THE INSTALLER.

Please ensure that any plastic coatings are removed prior to use. Before operation, the appliance should be thoroughly cleaned and dried.

Discolouration of heated parts is caused by factory testing to ensure a satisfactory unit. It does not affect quality or performance.


8.2 SITING / CLEARANCES




THIS APPLIANCE CAN BE SITED AGAINST A COMBUSTABLE WALL.

8.2.1 Position the appliance and level using feet or castors adjusters as shown below.

8.2.2 To adjust height of unit with feet twist lower half of feet as necessary.

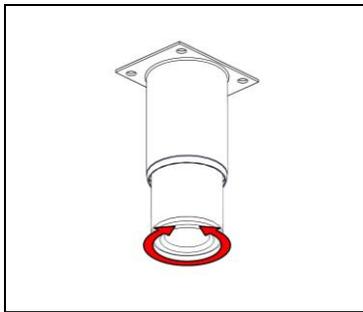

8.2.3 When on stand to adjust height of unit with feet twist lower half of feet as necessary.

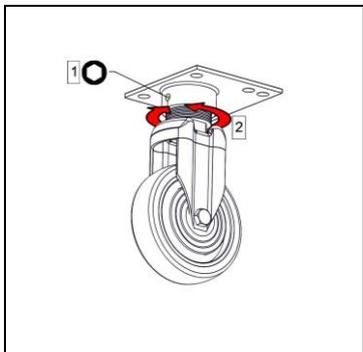

8.2.4 To adjust height of castor, loosen grub screw and twist body of castor as necessary.


Once height set to required position tighten grub screw to secure.



TAKE CARE WHEN MOVING AN APPLIANCE FITTED WITH CASTORS.

8.3 ELECTRIC SUPPLY & CONNECTION

The location of the electrical connection is as seen in section 5. this unit is suitable for AC supplies only.

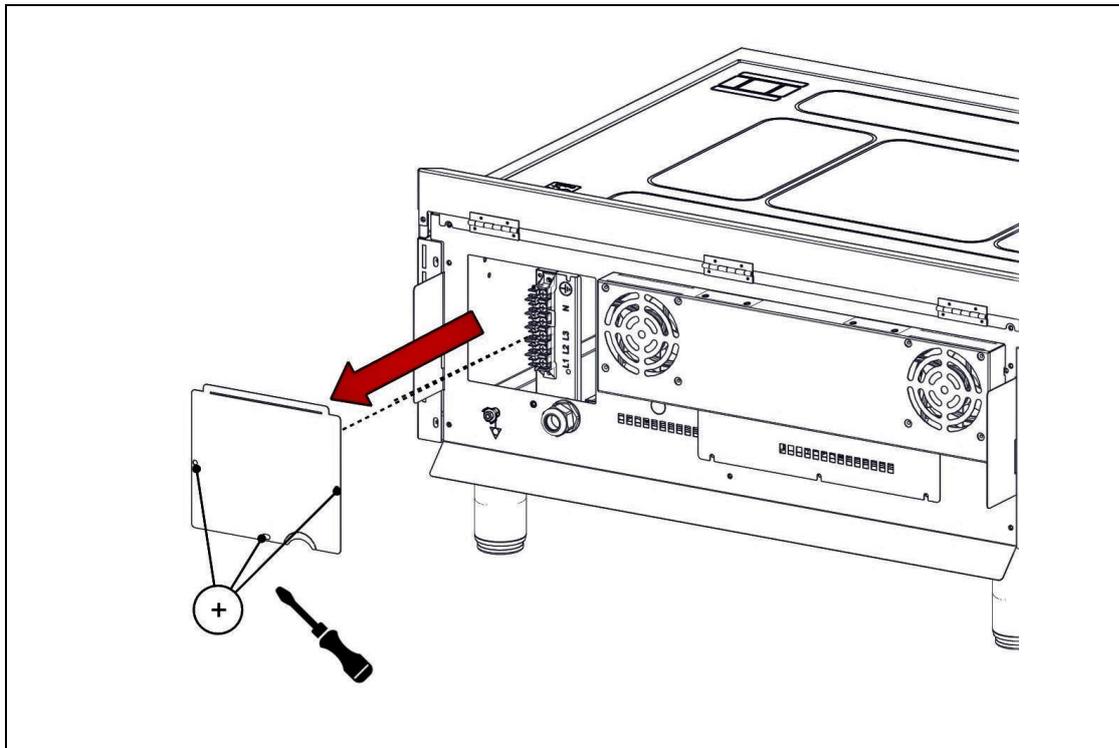

To install the mains cable, remove terminal cover and feed the cable through the cable gland and connect the mains supply to the terminal block.

WARNING: UNIT IS FITTED WITH A CAPACITOR



BEFORE REMOVING ANY LINKS FROM THE MAINS TERMINAL OR DISCONNECTING THE MAINS LEADS, ENSURE THE CAPACITOR IS DISCHARGED OF ANY STORED VOLTAGE.

THIS CAN BE ACHIVED BY BRIDGING THE LIVE TERMINALS OF THE MAINS CONNECTOR WITH THE EARTH LEAD THAT SHALL BE CONNECTED TO THE APPLIANCE.

A suitable supply cord is supplied that conforms to BSEN 50525-2-51, cable type JZ-500 HMH-C. This appliance is designed to, and must, be connected to suitably rated isolator. A suitable rated isolating switch with contact separation of at least 3mm in all poles must be installed and wiring executed in accordance with relevant regulations.

On this model. The standard terminal arrangement is Three phase (400V 3N~). Install an appropriate three phase mains supply cable with a 32amp plug.


Live 1 (Phase 1)	Brown
Live 2 (Phase 2)	Black
Live 3 (Phase 3)	Grey
Neutral	Blue
Earth	Yellow/Green
Screen	Silver



SCREEN FOR MAINS CABLE MUST BE CONNECTED TO EARTH AT THE SUPPLY AND THE TERMINAL STRIP WITHIN THE APPLIANCE.



THIS APPLIANCE MUST BE EARTHED



This appliance is also provided with a terminal for connection of an external equipotential conductor. This terminal is an effective electrical contact with all fixed exposed metal parts of the appliance and shall allow the connection of conductor having a nominal cross-section area of up to 10mm². It is located at the rear of the unit and identified by the following label and must only be used for bonding purposes.

8.4 COMMISSIONING

Refer to section 4.0 for operation.

Carry out the following operation:

8.4.1 Turn on mains power supply on.

8.4.2 Ensure red neon(s) illuminates,

8.4.3 Ensure LED on Hob Illuminates and begins to flash.

8.4.4 Switch controls to "0"

8.4.5 Place a pan suitable for induction cooker tops, filled with water, upon a cooking zone.
The pan minimum diameter cannot be less than 120mm.

8.4.6 Switch all cooking zones on to position 8.

6.4.1 Check that the LEDS on the hob go solid and corresponding digital display on hob illuminates and remains lit. This indicates that "Pan detection" feature is working.

8.4.7 Repeat on all different cooking zones.

8.4.8 Leave pots to heat up until water boils and switch controls down to maintain simmer.

8.4.9 Switch controls off.

8.5 INSTRUCTION TO USER

8.5.1 After installation and commissioning have been completed, please hand the user instructions to the user, and provide the required training to ensure that the person/s responsible understands the instructions regarding the correct operation and cleaning of the appliance.



PLEASE FILL OUT THE INFORMATION TABLE ON THE FRONT COVER AFTER COMMISSIONING


If the appliance does not operate correctly, please refer to section 11.0 and rectify the problem.

9.0 SERVICING

9.1 CONTROL PANEL REMOVAL



BEFORE ATTEMPTING ANY MAINTENANCE, ISOLATE THE APPLIANCE AT THE MAINS SWITCH AND TAKE STEPS TO ENSURE THAT IT IS NOT INADVERTENTLY SWITCHED ON.

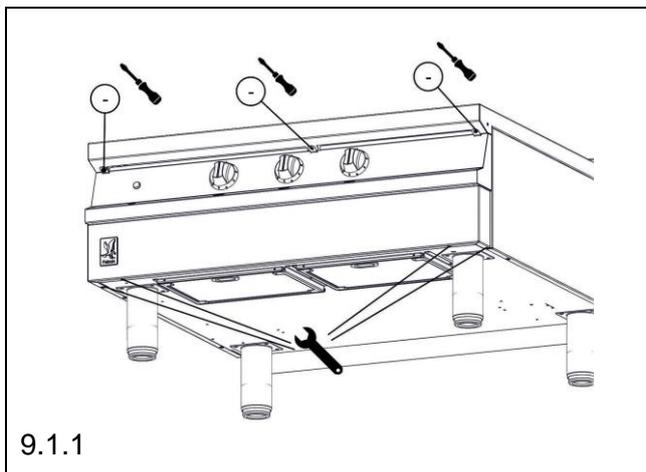


9.1.1 Remove fixings at top control panel and lower control panel.

9.1.2 When replacing panel, take care not to trap any connecting wires. Replace shake proof washers below fixings.

9.2 REAR FAN COVER REMOVAL




BEFORE ATTEMPTING ANY MAINTENANCE, ISOLATE THE APPLIANCE AT THE MAINS SWITCH AND TAKE STEPS TO ENSURE THAT IT IS NOT INADVERTENTLY SWITCHED ON.

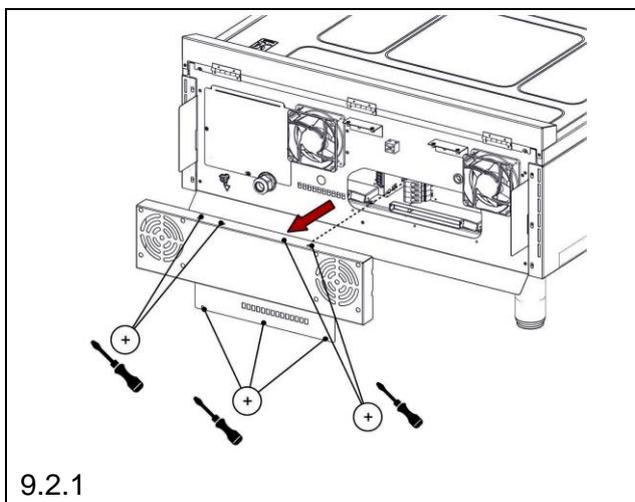

9.2.1 To remove undo screws on the rear fan cover to release panel.

9.3 FUSE REMOVAL


9.3.1 Remove control panel as detailed in section 9.1.

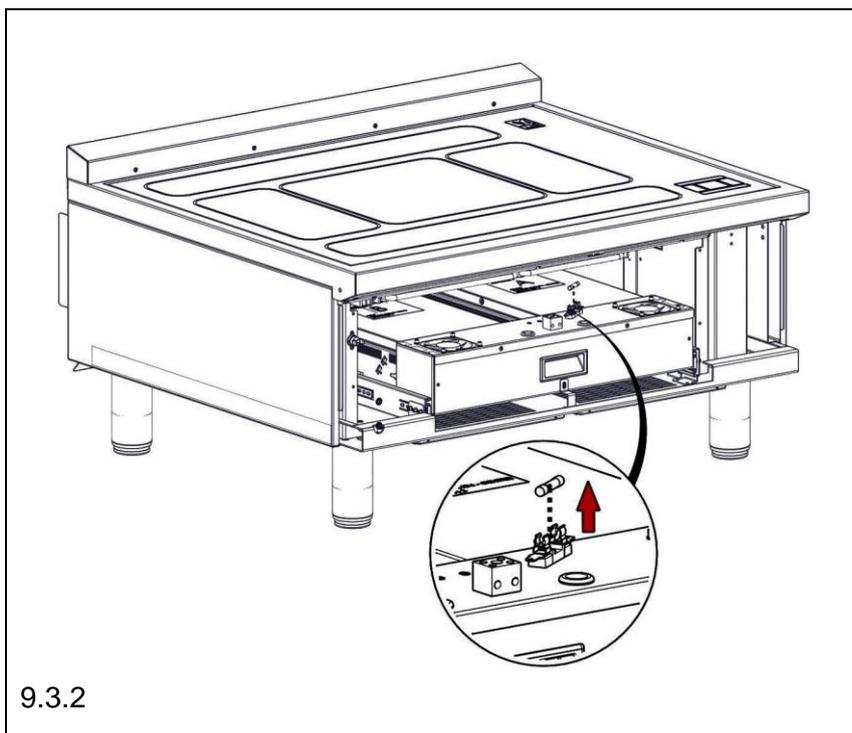

9.3.2 Remove fuse

9.4 CONTROL SWITCHES REMOVAL

9.4.1 Remove control panel as detailed in Section 9.1.

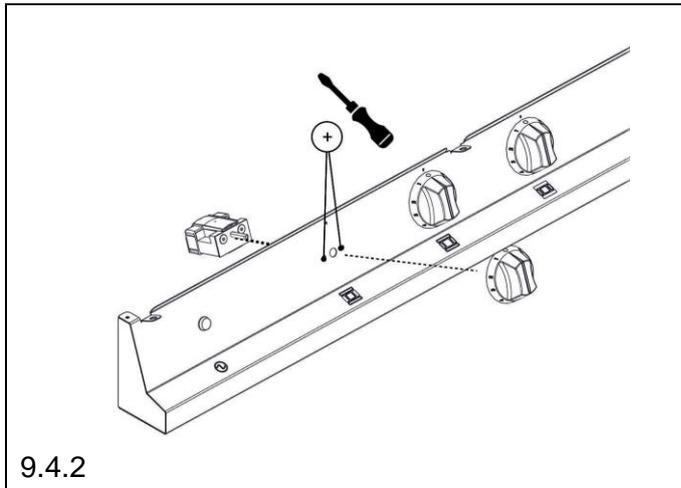

9.4.2 Remove switch connections and note wire arrangement. Pull off control knob. Undo fixings to release switch.


9.4.3 Fit replacement switch, ensuring that shake proof washers are fitted below the fixings.

9.5 HOB COOLING THERMOSTAT REMOVAL

9.5.1 The hob chamber temperature is controlled with a thermostat, the thermostat is self-resetting. It is located on the front left hand coil support.

9.5.2 Remove control panel as detailed in section 9.1.

9.5.3 Disconnect leads from thermostat.

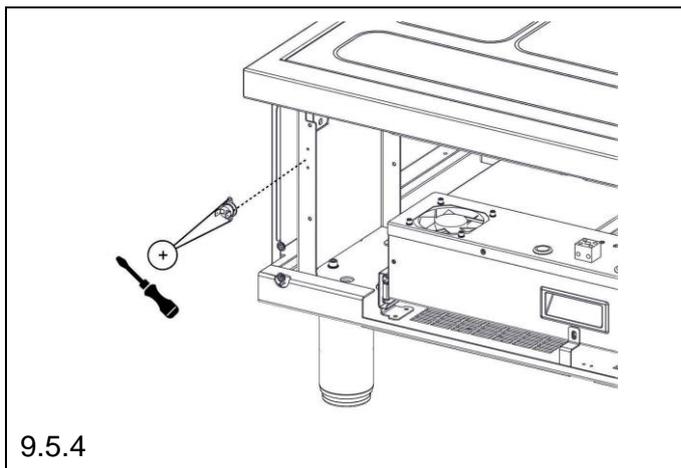


9.5.4 To remove undo two screws on the flanged collar and release.

9.5.5 When re-fitting ensures all electrical connections to be restored as detailed in wiring diagram.

9.6 FRONT COOLING FAN REMOVAL


9.6.1 Remove control panel as detailed in section in 9.1.

9.6.2 Disconnect generator power cables as detailed in section 9.8.

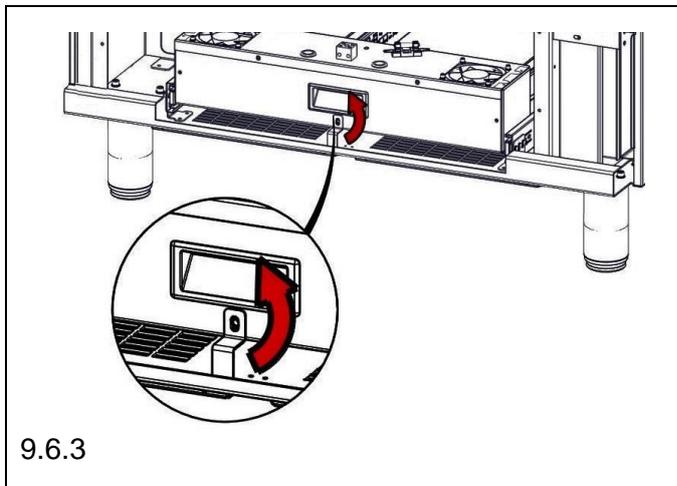

9.6.3 Rotate catch on generator tray to enable tray to slide out.

9.6.4 Gently slide out generator tray ensuring not to snag any cabling within the unit.

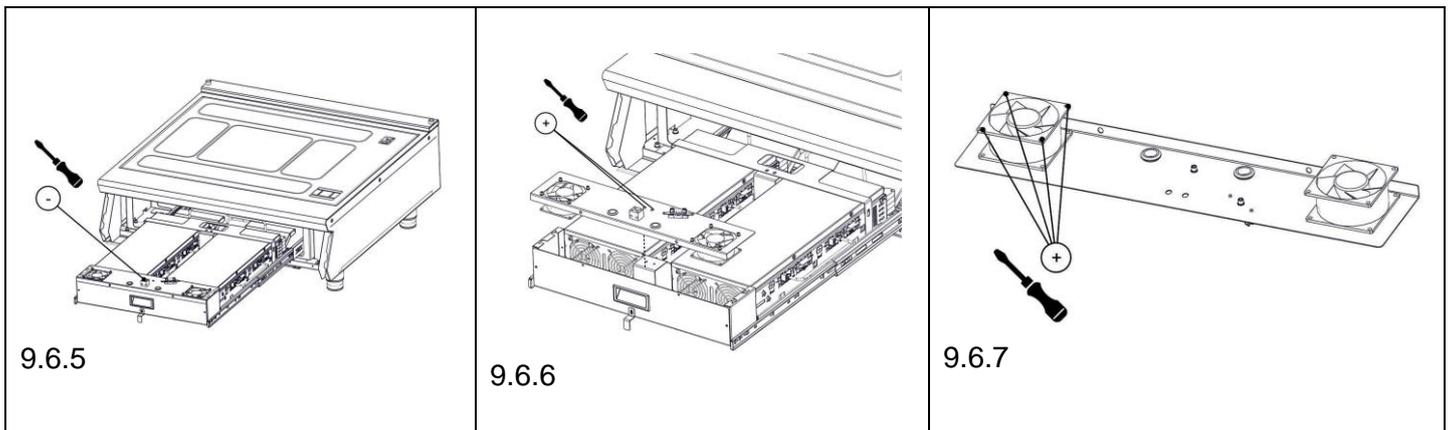

9.6.5 Disconnect relevant fan leads from terminal block.


9.6.6 Undo four screws on fan tray to release to tray.

9.6.7 Rotate tray and undo screws on relevant fan.

9.6.8 When re-fitting ensures all electrical connections are restored as detailed in wiring diagram.

9.6.9 When re-fitting ensures all electrical connections are restored as detailed in wiring diagram.


Note: Two fans at front of appliance induce cold air from outside of the appliance.

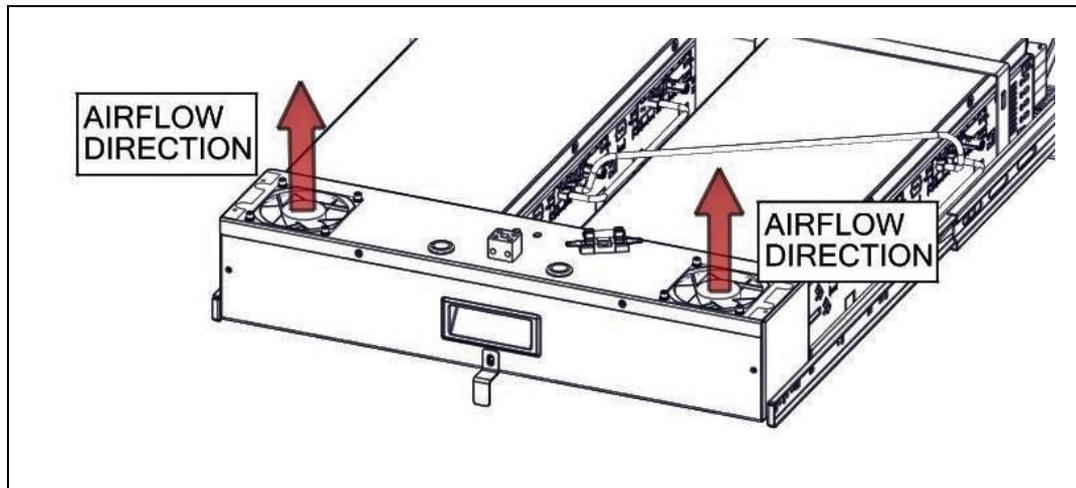

9.7 RELEASE & OPEN HOB




BEFORE ATTEMPTING ANY MAINTENANCE, ISOLATE THE APPLIANCE AT THE MAINS SWITCH AND TAKE STEPS TO ENSURE THAT IT IS NOT INADVERTENTLY SWITCHED ON.

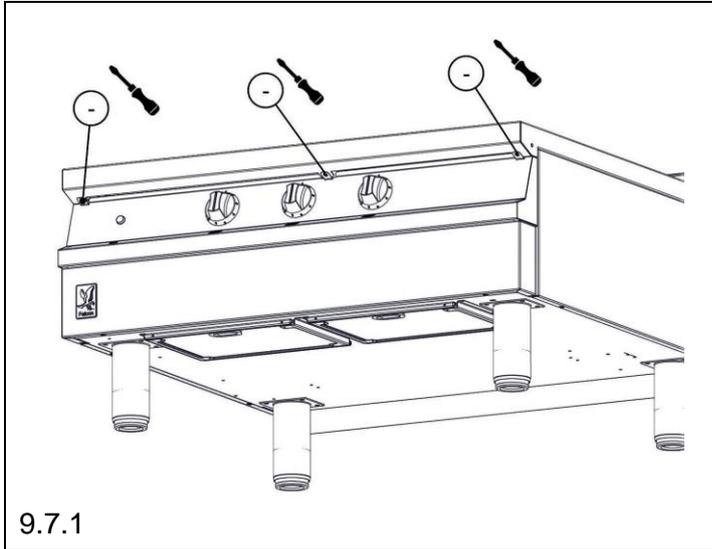

9.7.1

9.7.1 Remove fixings at top control panel.

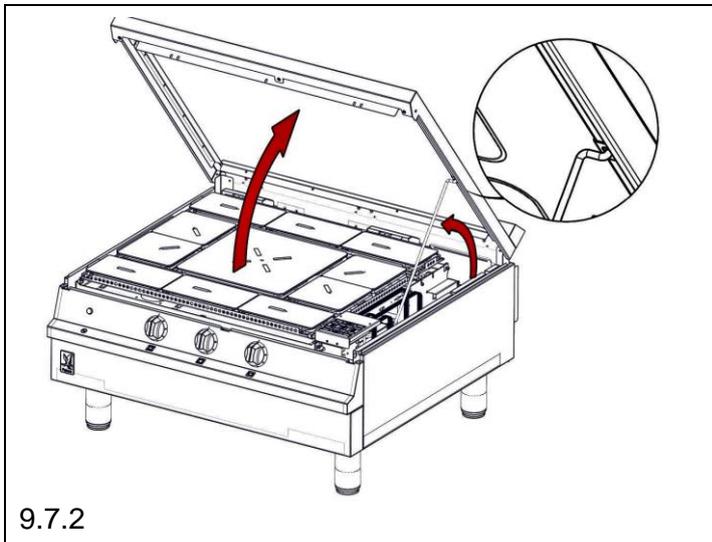


9.7.2

9.7.2 Tilt hob up and lift hob stay into position. Insert cranked end into slot on underside of hob.as shown above. Ensure stay is secure before work is carried out.

9.8 LED DIGITAL DISPLAY PCB REPLACEMENT

9.8.1 Open Hob as detailed in section 9.7

9.8.2 Un-do two screws on LED circuit board guard.

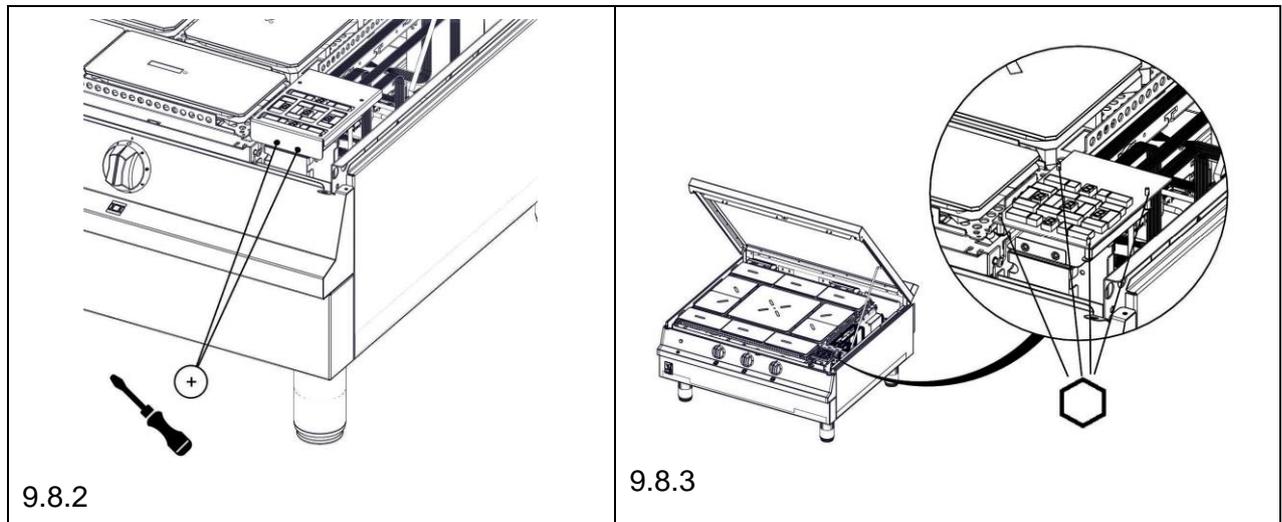

LED PCB BOARD IS SUPPLIED IN A ESD BAG. WHEN REPLACING ENGINEER SHOULD TOUCH THE HOB SURFACE TO DISCHARGE HIMSELF BEFORE REMOVING REPLACEMENT BOARD FROM BAG.

9.8.3 Using a 5.5mm Socket un-do four plastic nuts on LED circuit board.

9.8.4 Un-plug all display cables from rear of board.

9.8.5 When re-fitting ensures all cable connections are restored as detailed in the wiring diagram.


9.9 DISCONNECT GENERATOR POWER CABLES



BEFORE ATTEMPTING ANY MAINTENANCE, ISOLATE THE APPLIANCE AT THE MAINS SWITCH AND TAKE STEPS TO ENSURE THAT IT IS NOT INADVERTENTLY SWITCHED ON.

9.9.1 Remove rear fan cover as detailed in section 9.2.

9.9.2 Disconnect generator power leads from both generators.

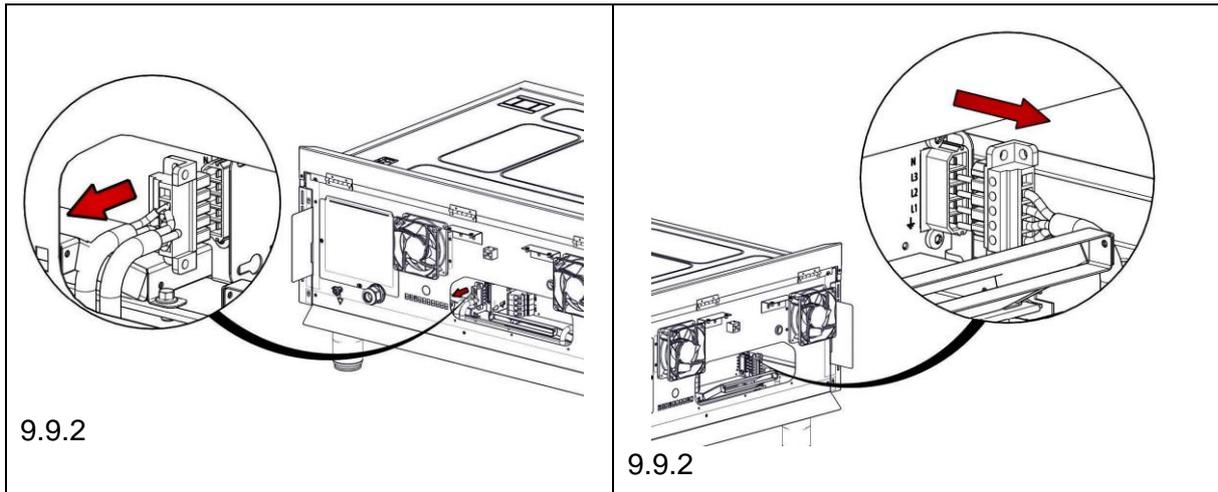


9.10 DISCONNECT COIL POWER CABLES

9.10.1 Remove control panels as detailed in section 9.1.

9.10.2 Remove rear fan cover as detailed in section 9.2.


9.10.3 Disconnect generator power cables as detailed in section 9.9.

9.10.4 Rotate catch on generator tray to enable tray to slide out.

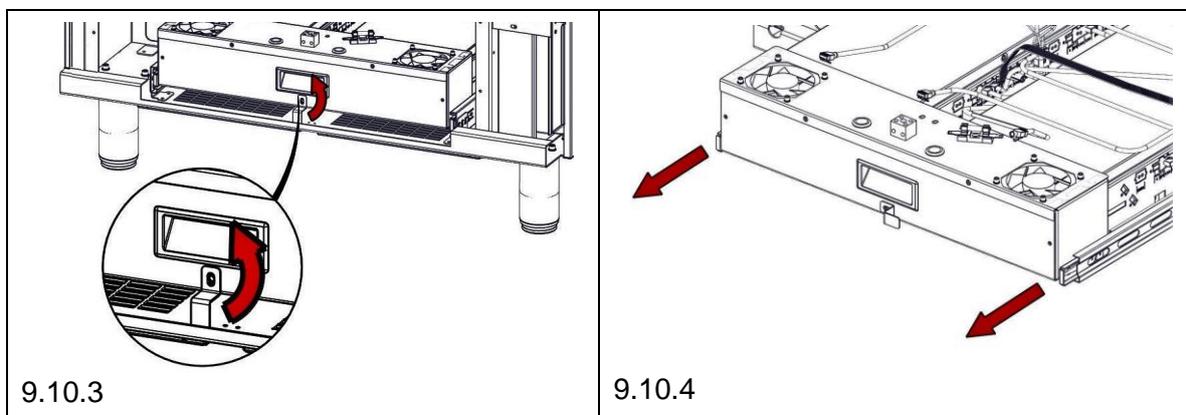

9.10.5 Gently slide out generator tray ensuring not to snag any cabling within the unit.

9.10.6 Disconnect coil power cable and screen from each generator.

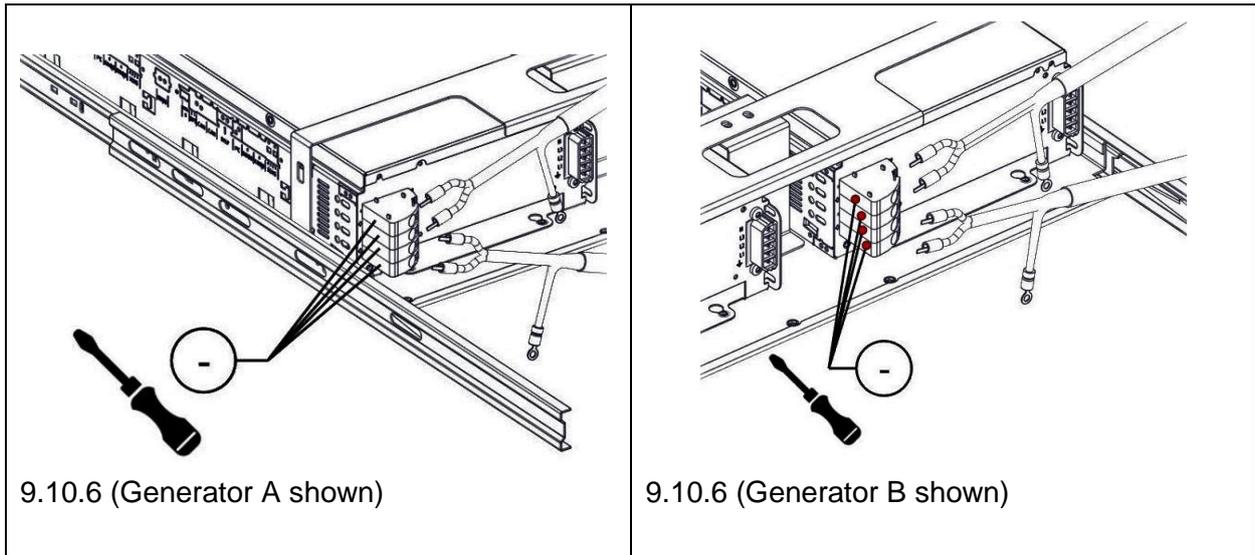

9.10.7 When re-fitting ensures all electrical connections are restored as detailed in the wiring diagram.

9.11 MEMORY STICK REMOVAL


Generators have been fitted with external Memory sticks; this contains specific operating parameters for the appliance.

9.11.1 Remove control panels as detailed in section 9.1.


9.11.2 Disconnect generator power cables as detailed in section 9.9.

9.11.3 Rotate catch on generator tray.

9.11.4 Gently slide out generator tray ensuring not to snag any cabling within the unit.

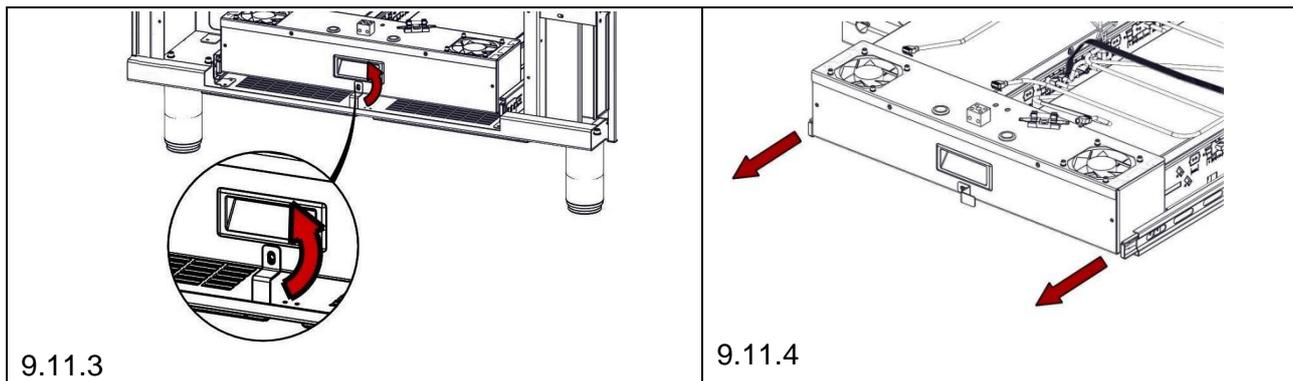

9.11.5 Un plug memory stick (see below image of memory stick locations for ref)

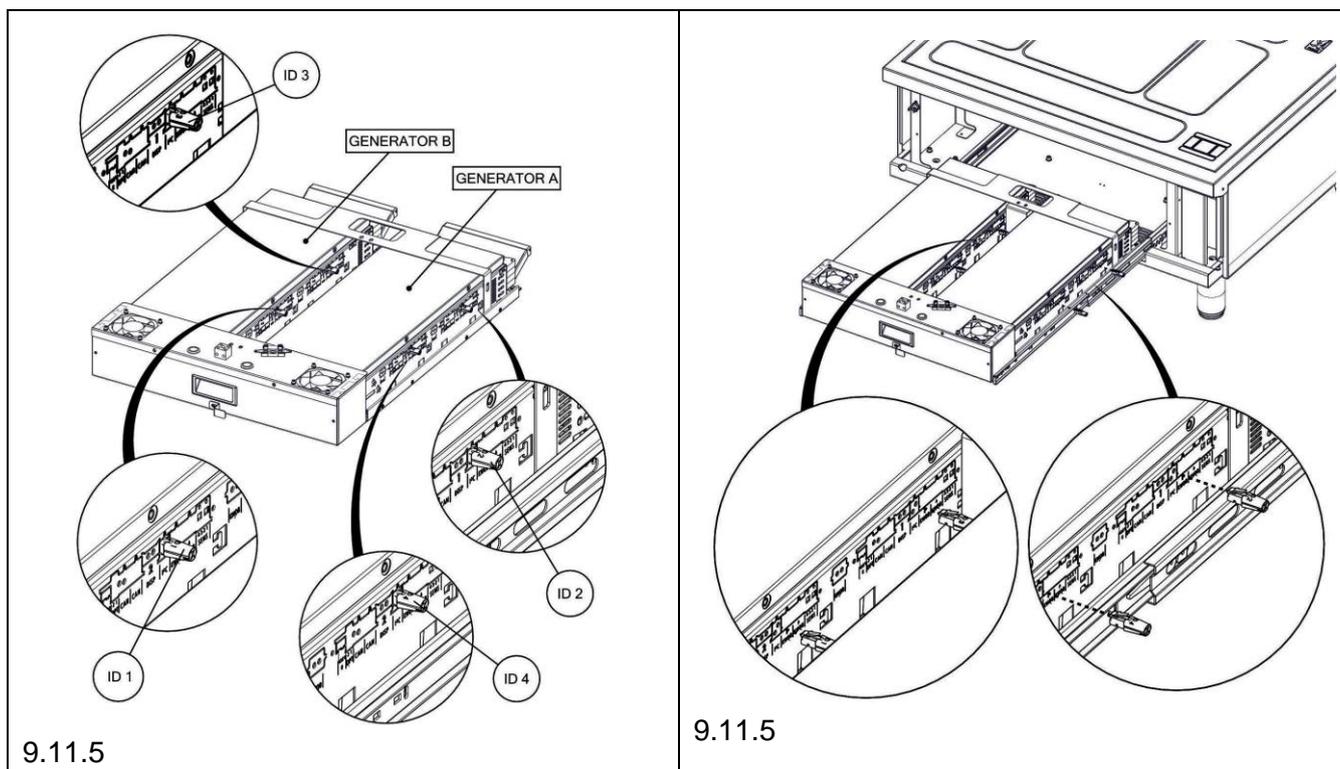

9.11.6 When re-fitting ensures all electrical connections & memory sticks are restored as detailed in the wiring diagram.

Note: When turning on the appliance the parameters are loaded from the memory stick to the generator.

9.12 GENERATOR REMOVAL




BEFORE ATTEMPTING ANY MAINTENANCE, ISOLATE THE APPLIANCE AT THE MAINS SWITCH AND TAKE STEPS TO ENSURE THAT IT IS NOT INADVERTENTLY SWITCHED ON.

9.12.1 Remove control panel as detailed in section 9.1.


9.12.2 Release and open hob as detailed in section 9.7.

9.12.3 Disconnect relevant generator power cables as detailed section 9.9.


9.12.4 Un-do screws on access panel and release relevant generator exhaust ducts from generator tray.

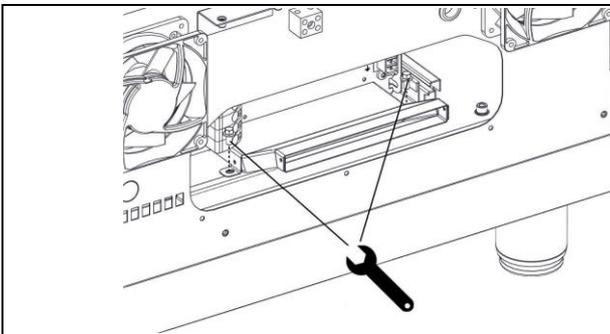


9.12.4 (Generator B exhaust duct)

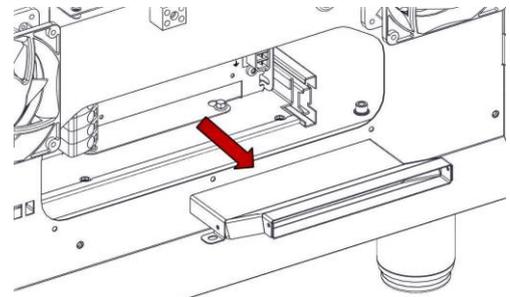


9.12.4 (Generator B exhaust duct)

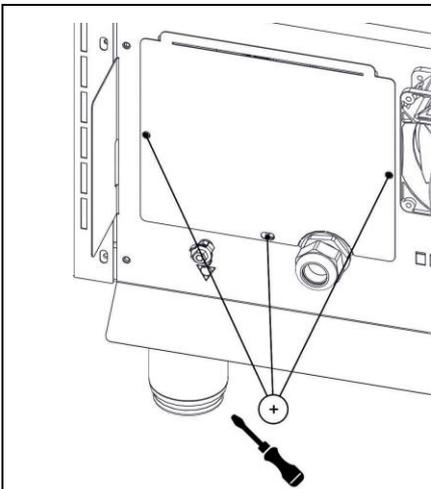

9.12.4

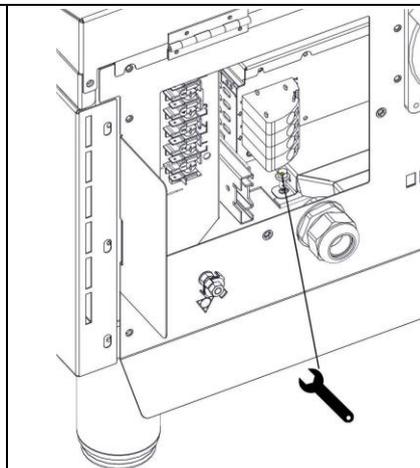

9.12.4 (Generator A exhaust duct)

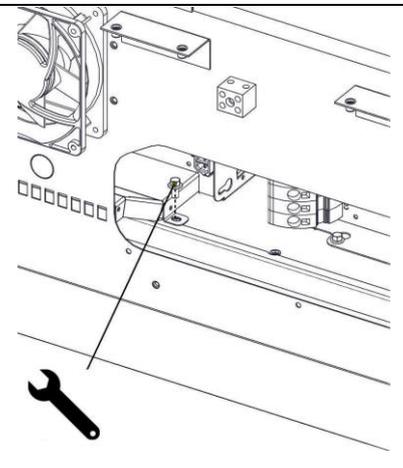


9.12.4 (Generator A exhaust duct)


9.12.5 Disconnect relevant earth cable from relevant generator to coil carrier supports.

9.12.6 Disconnect relevant coil power cables as detailed in section 9.10.

9.12.7 Un-plug relevant data & sensor cables from relevant generator

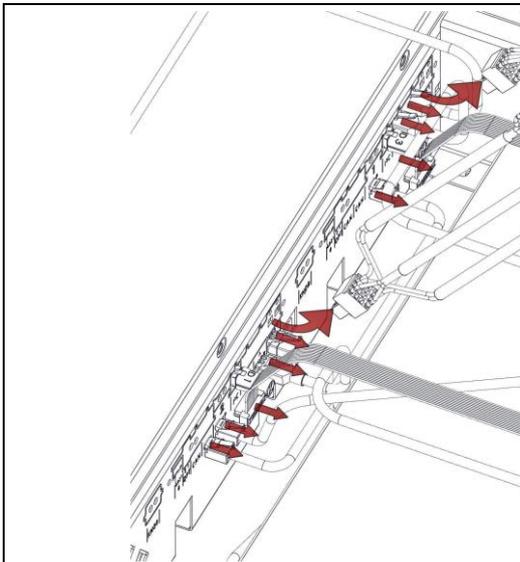


9.12.5 (Generator B shown)

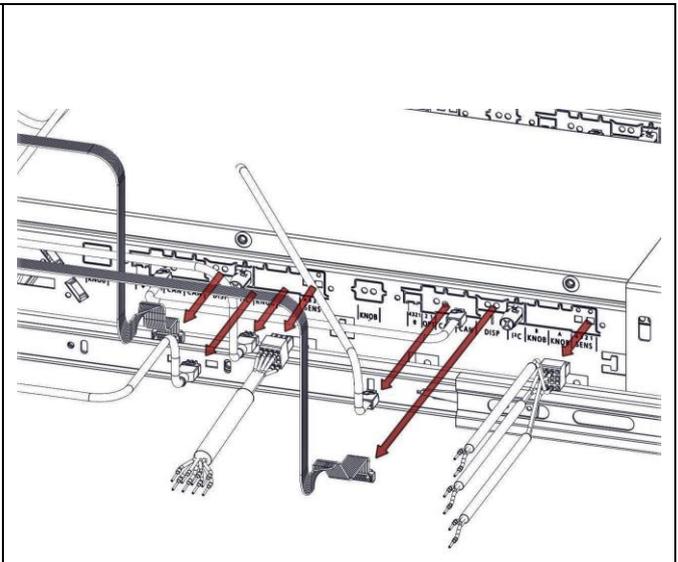


9.12.5 (Generator A shown)

9.12.8 Un-do two screws on fixing strap.

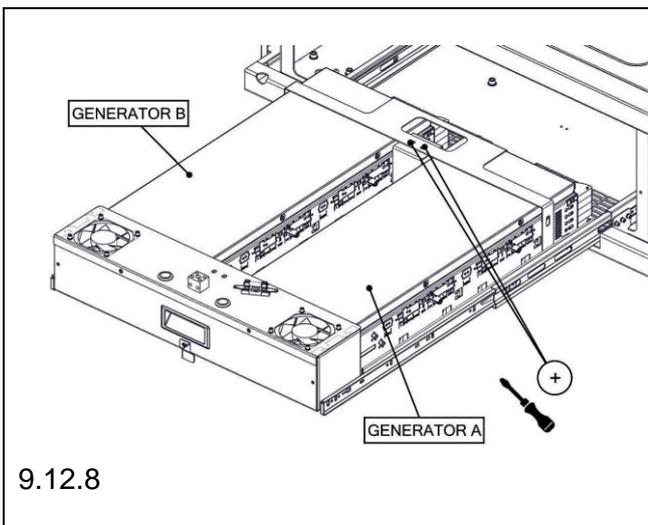

9.12.8

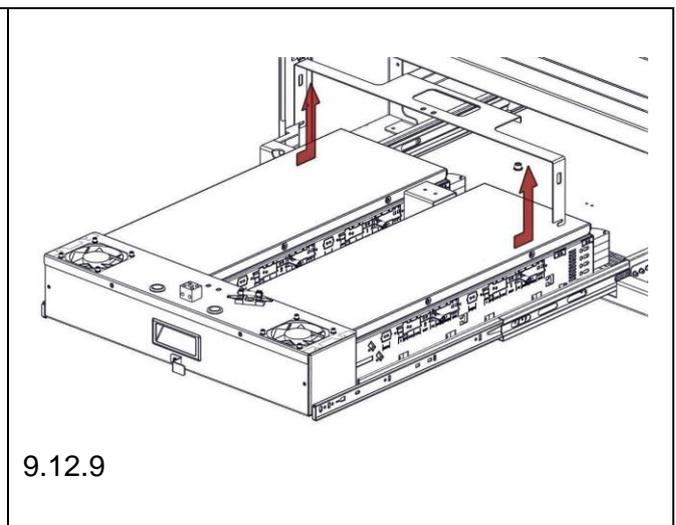

9.12.9

9.12.9 Push back fixing strap and pull up to release (**Note:** fixing strap is hooked into generator tray).

9.12.10 Tilt Generator up from rear and lift from tray.

9.12.11 When re-fitting ensures all electrical connections & memory sticks are restored as detailed in the wiring diagram.


9.13 INDUCTION HEATER COILS REMOVAL



BEFORE ATTEMPTING ANY MAINTENANCE, ISOLATE THE APPLIANCE AT THE MAINS SWITCH AND TAKE STEPS TO ENSURE THAT IT IS NOT INADVERTENTLY SWITCHED ON.

9.13.1 Release and open hob as detailed section 9.7.


9.13.2 Carefully relocate control panel below the unit without disconnecting wiring.

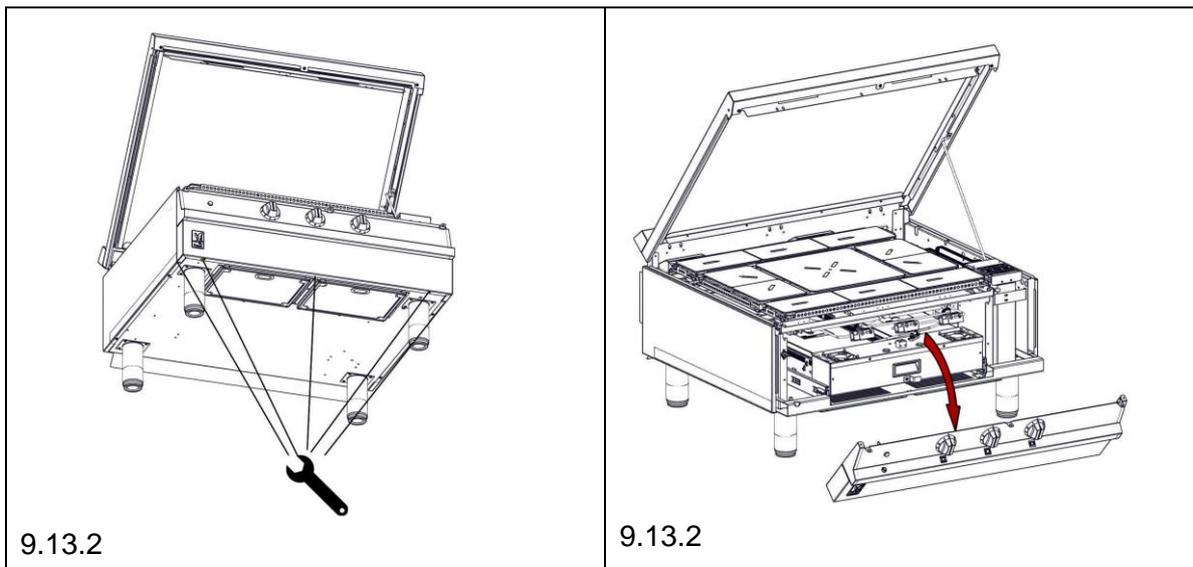

9.13.3 Disconnect relevant coil power wires as detailed in section 9.10.

9.13.4 Disconnect relevant earth wires from coil supports.

9.13.5 Whilst feeding sensor and power coil cables lift relevant coil carrier from unit

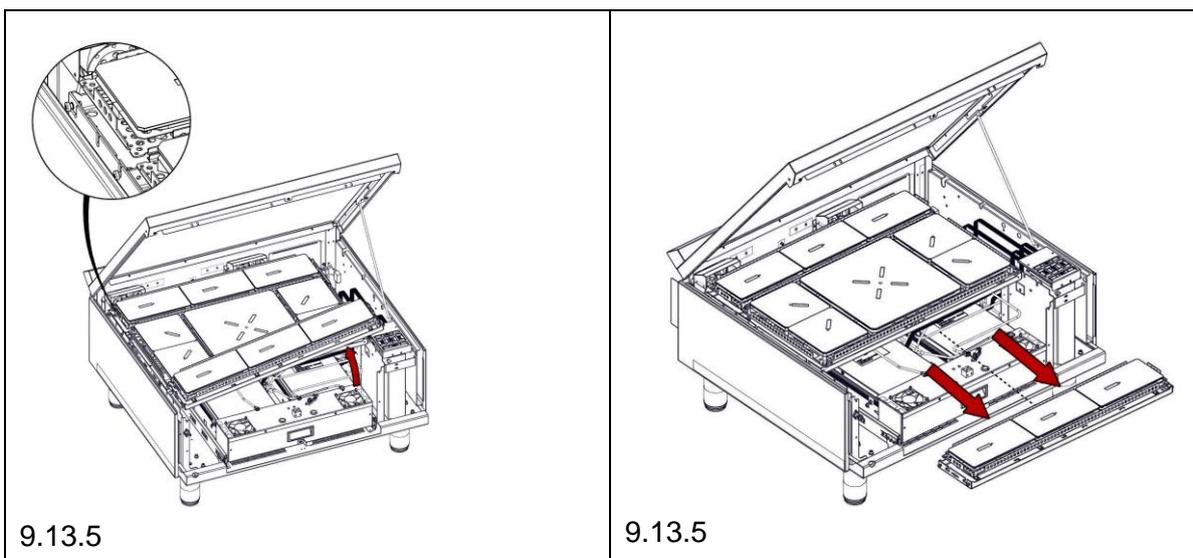


9.13.6 When re-fitting ensure all electrical connections are restored as detailed in the wiring diagram. -


9.14 REAR COOLING FAN REMOVAL

9.14.1 Remove fan rear cover as per section 9.2.

9.14.2 Disconnect relevant fan leads from terminal block and undo four screws on fan to release.

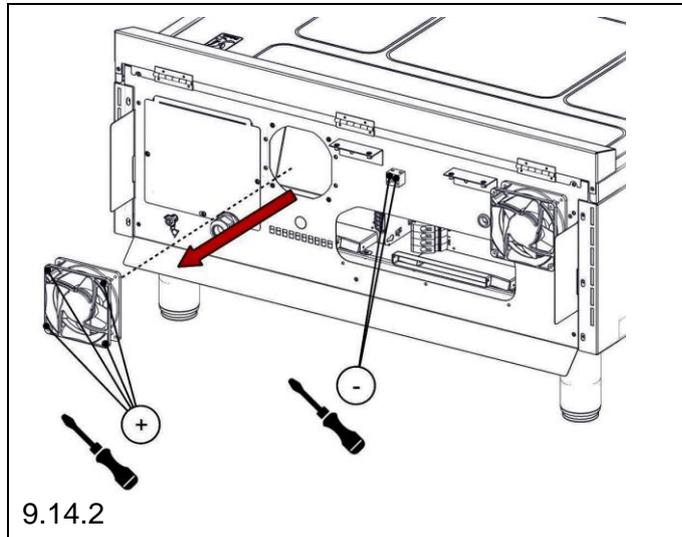

Note: Two fans extract the hot air from inside the appliance.

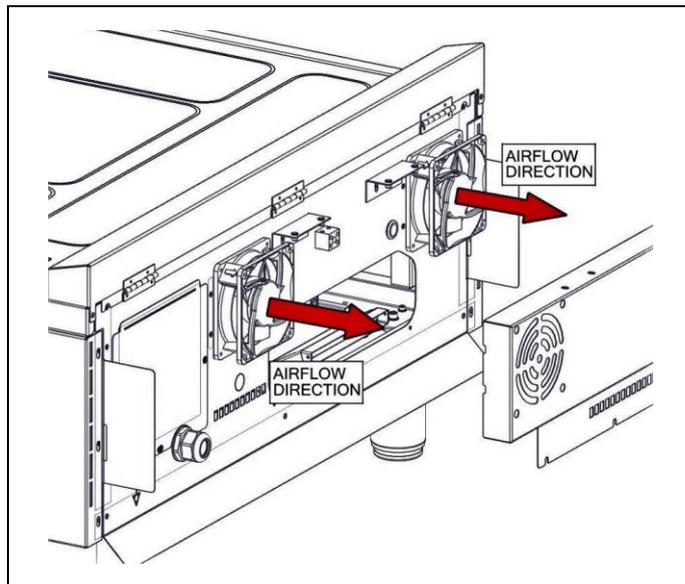

9.14.3 When re-fitting ensures all electrical connections are restored as detailed in the wiring diagram.

9.15 CAPICTOR REMOVAL



BEFORE ATTEMPTING ANY MAINTENANCE, ISOLATE THE APPLIANCE AT THE MAINS SWITCH AND TAKE STEPS TO ENSURE THAT IT IS NOT INADVERTENTLY SWITCHED ON.

WARNING: UNIT IS FITTED WITH A CAPACITOR




BEFORE REMOVING ANY LINKS FROM THE MAINS TERMINAL OR DISCONNECTING THE MAINS LEADS, ENSURE THE CAPACITOR IS DISCHARGED OF ANY STORED VOLTAGE.

THIS CAN BE ACHIVED BY BRIDGING THE LIVE TERMINALS OF THE MAINS CONNECTOR WITH THE EARTH LEAD THATY SHALL BE CONNECTED TO THE APPLIANCE.

9.15.1 Un-fasten screws on rear terminal plate.

9.15.2 Un-plug capacitor leads from terminal block.

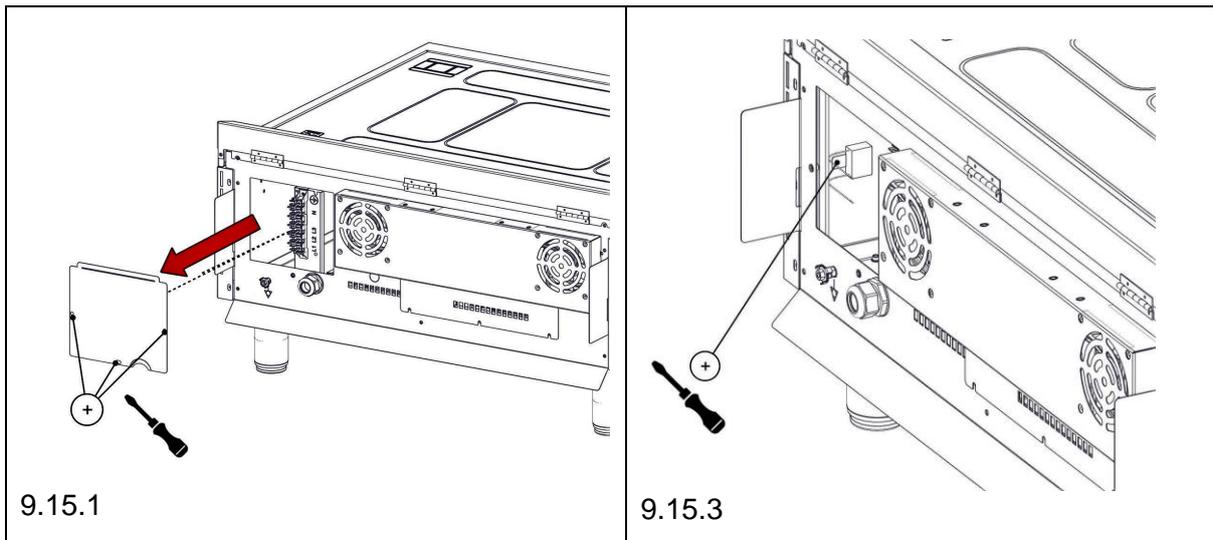


9.15.3 Un-fasten screw on capacitor mounting plate to release.

9.15.4 When re-fitting ensures all electrical connections are restored as per detailed in wiring diagram.


9.16 CIRCUIT DIAGRAMS

9.16.1 E39071 Circuit diagram

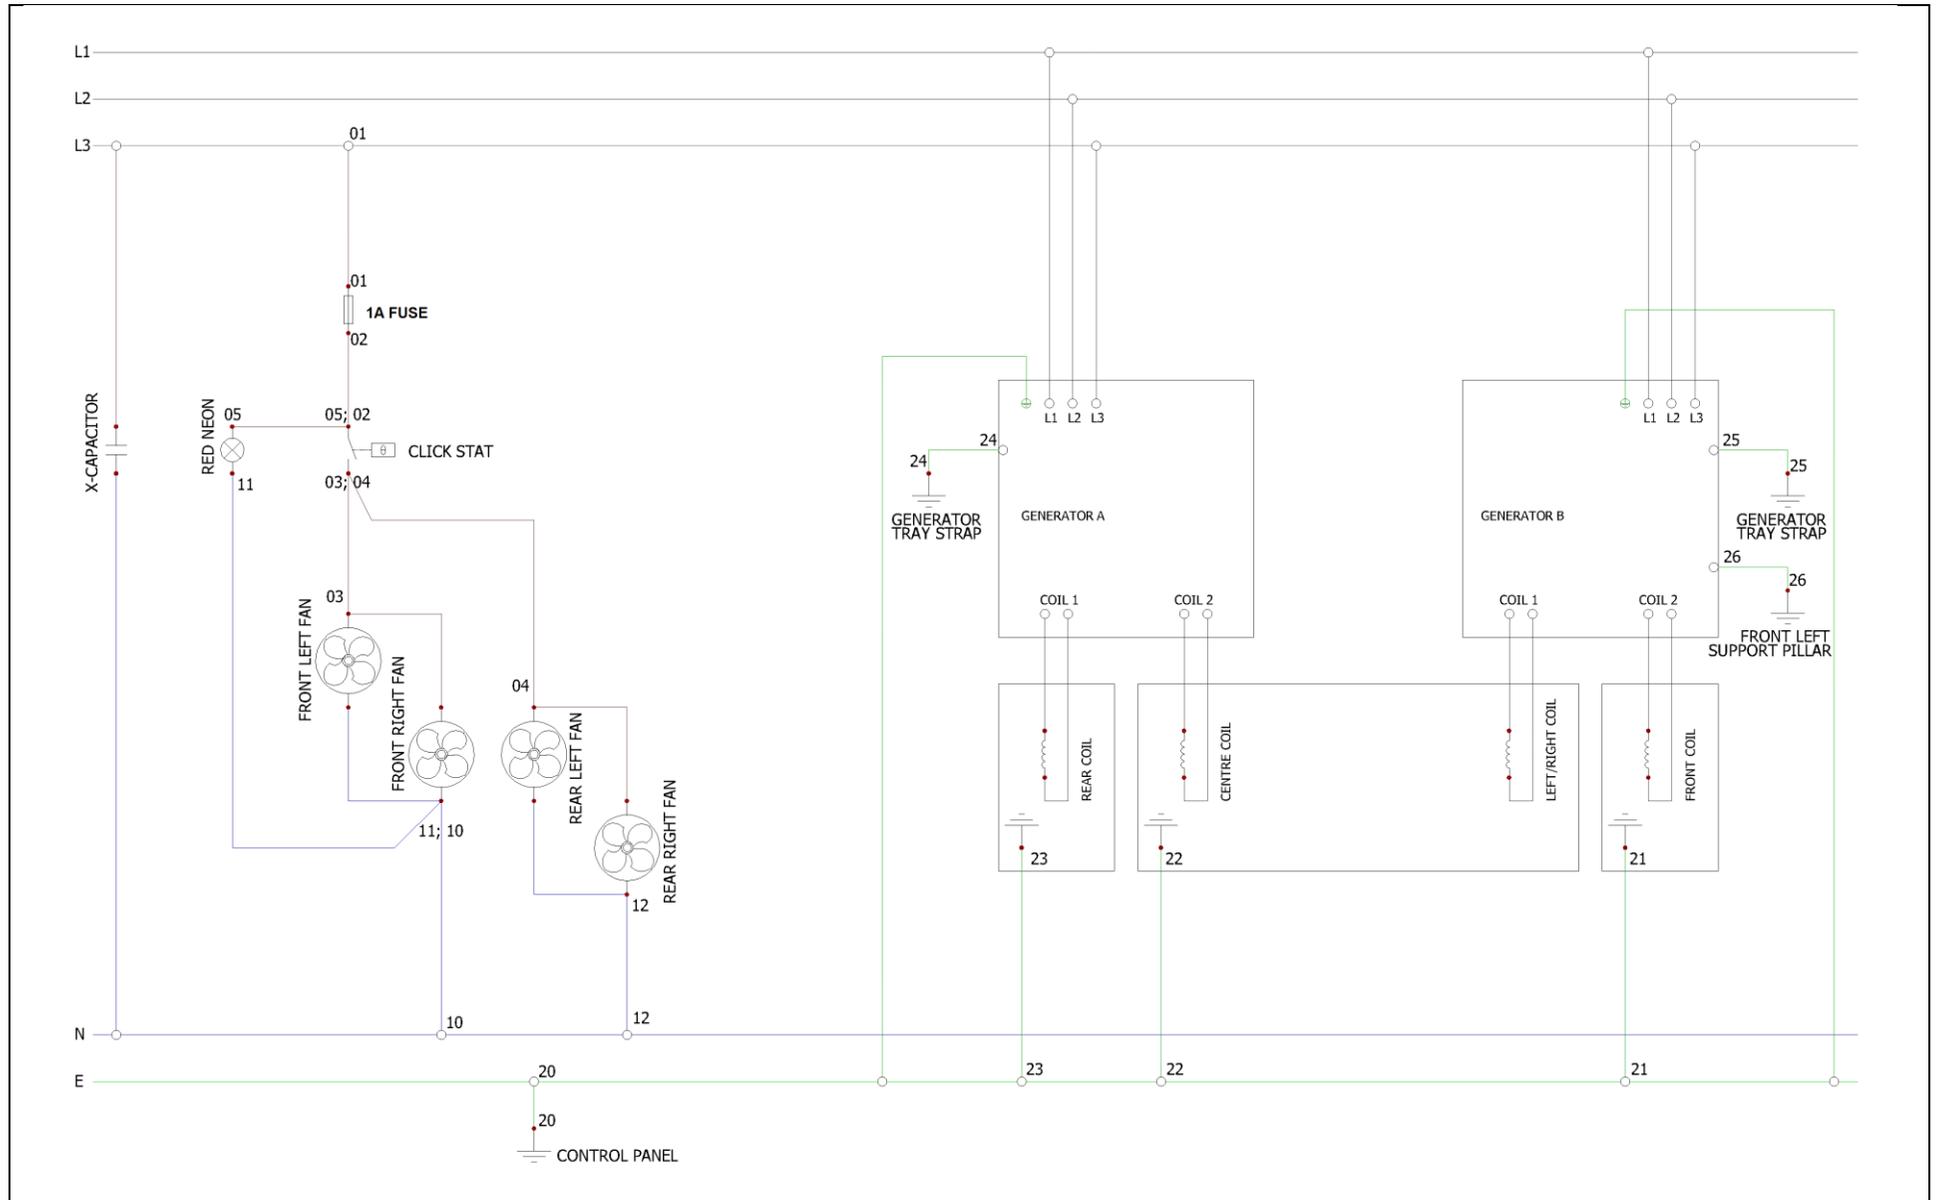


9.17 WIRING DIAGRAMS


9.17.1 E3907i Fan & neon wiring diagram

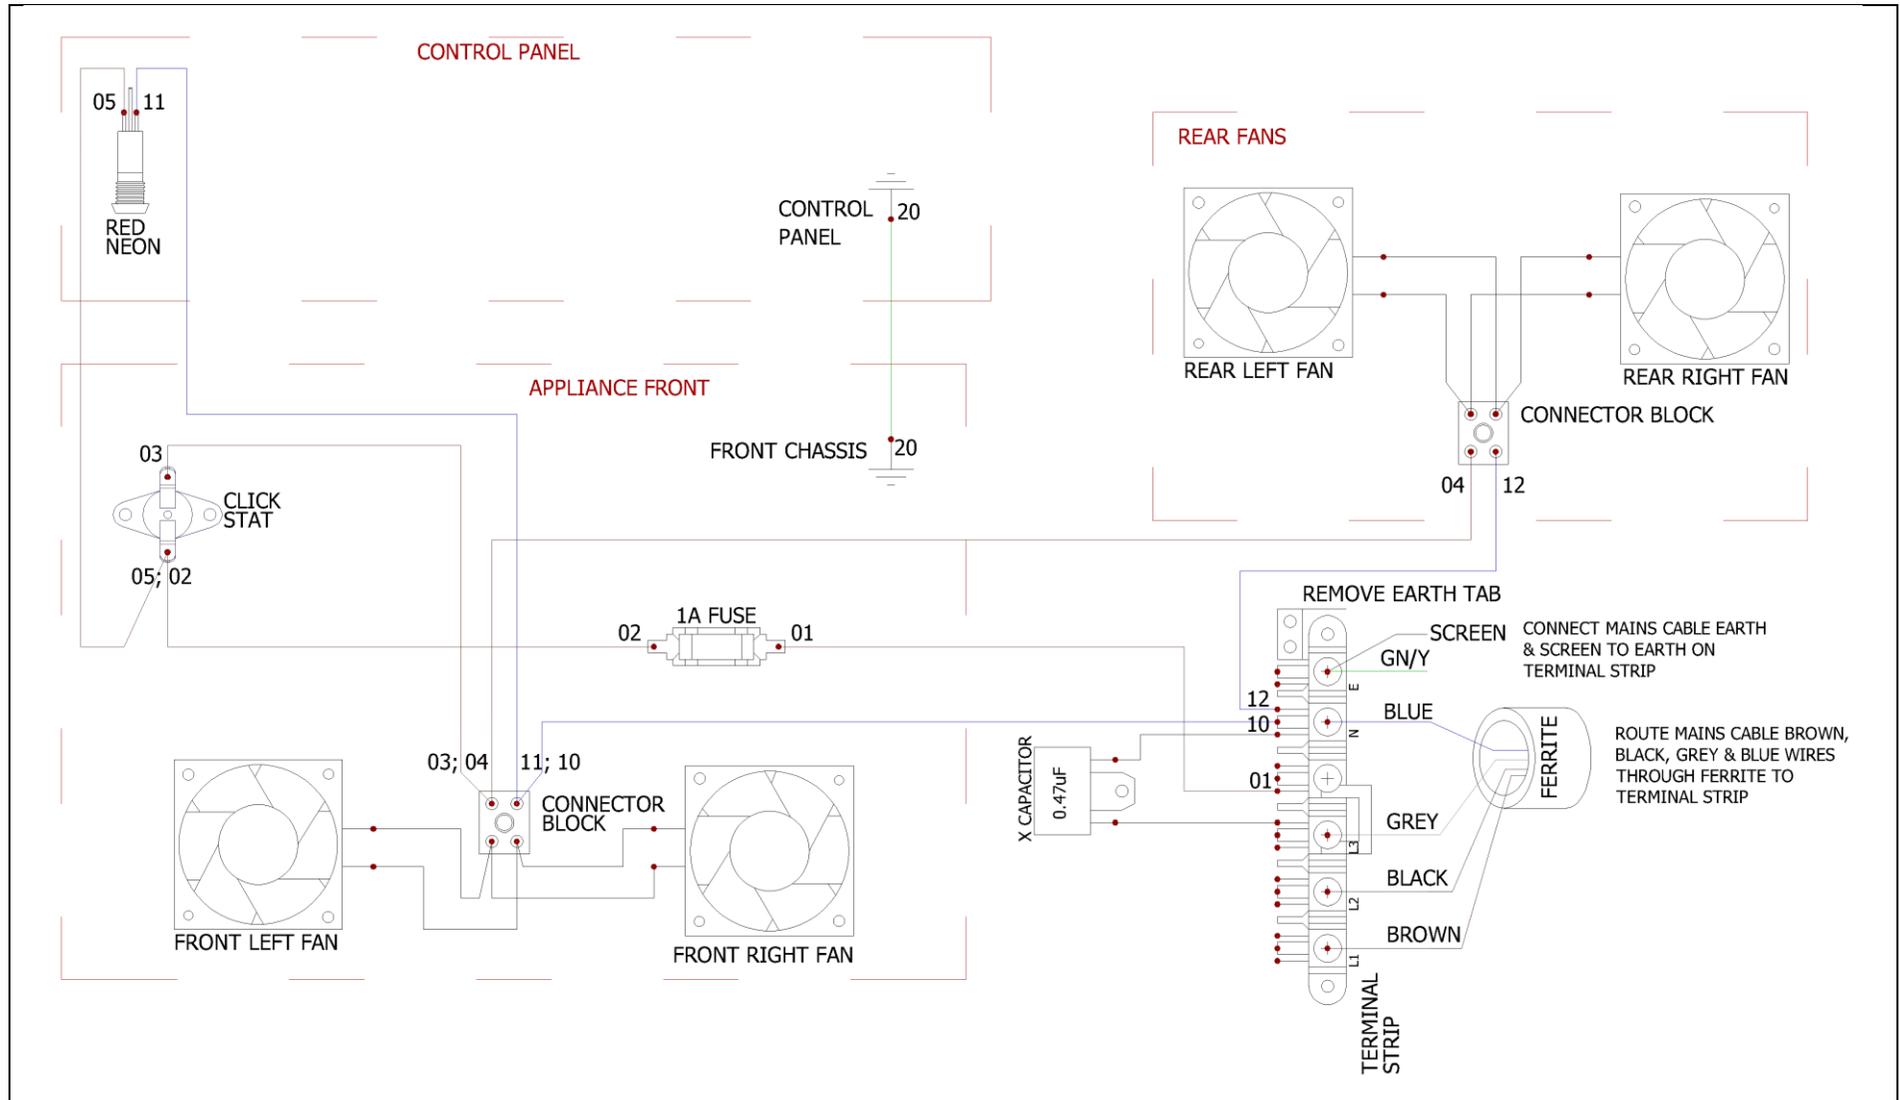


9.17.2 E3907i Generator A diagram

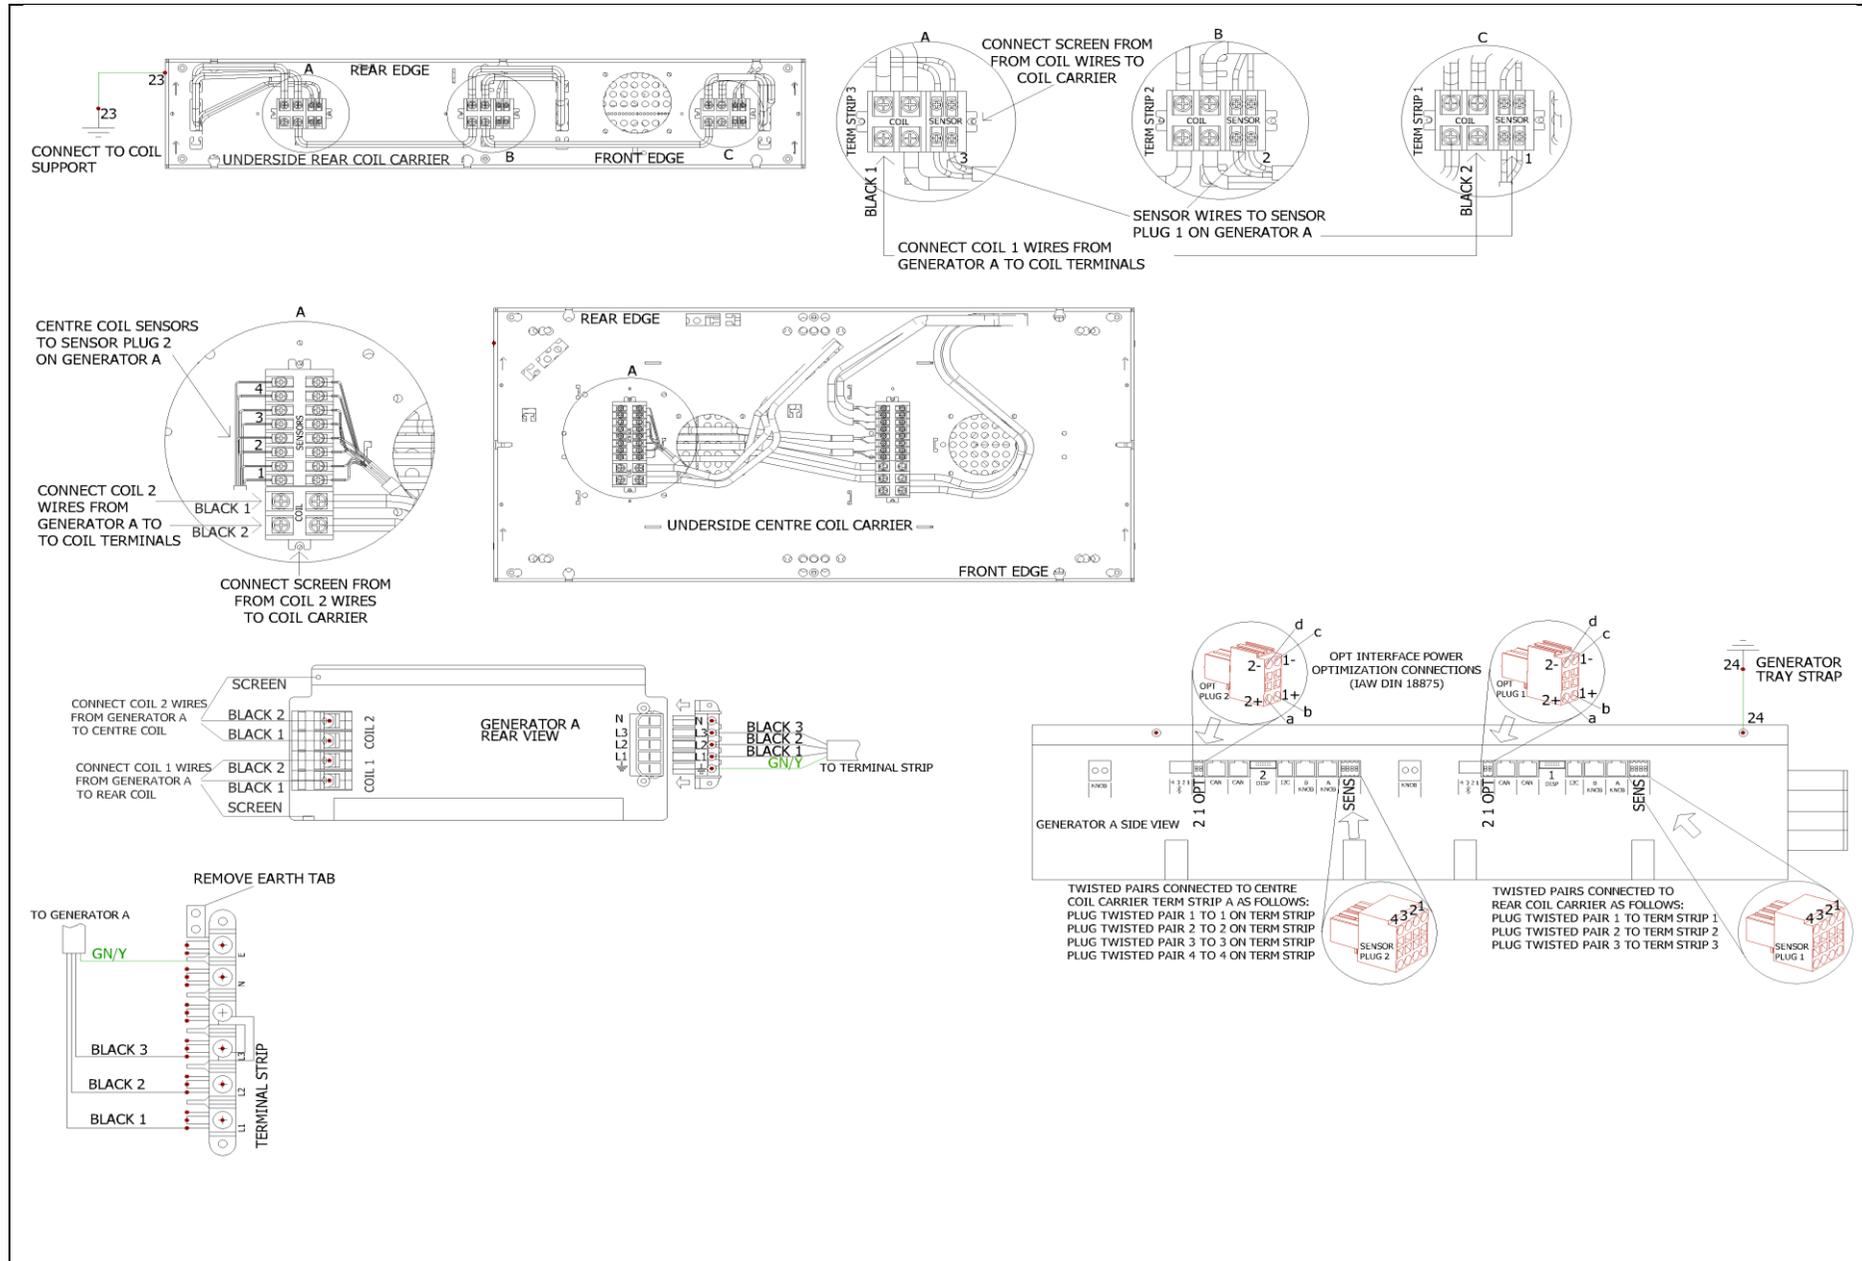

9.17.3 E3907i Generator B diagram

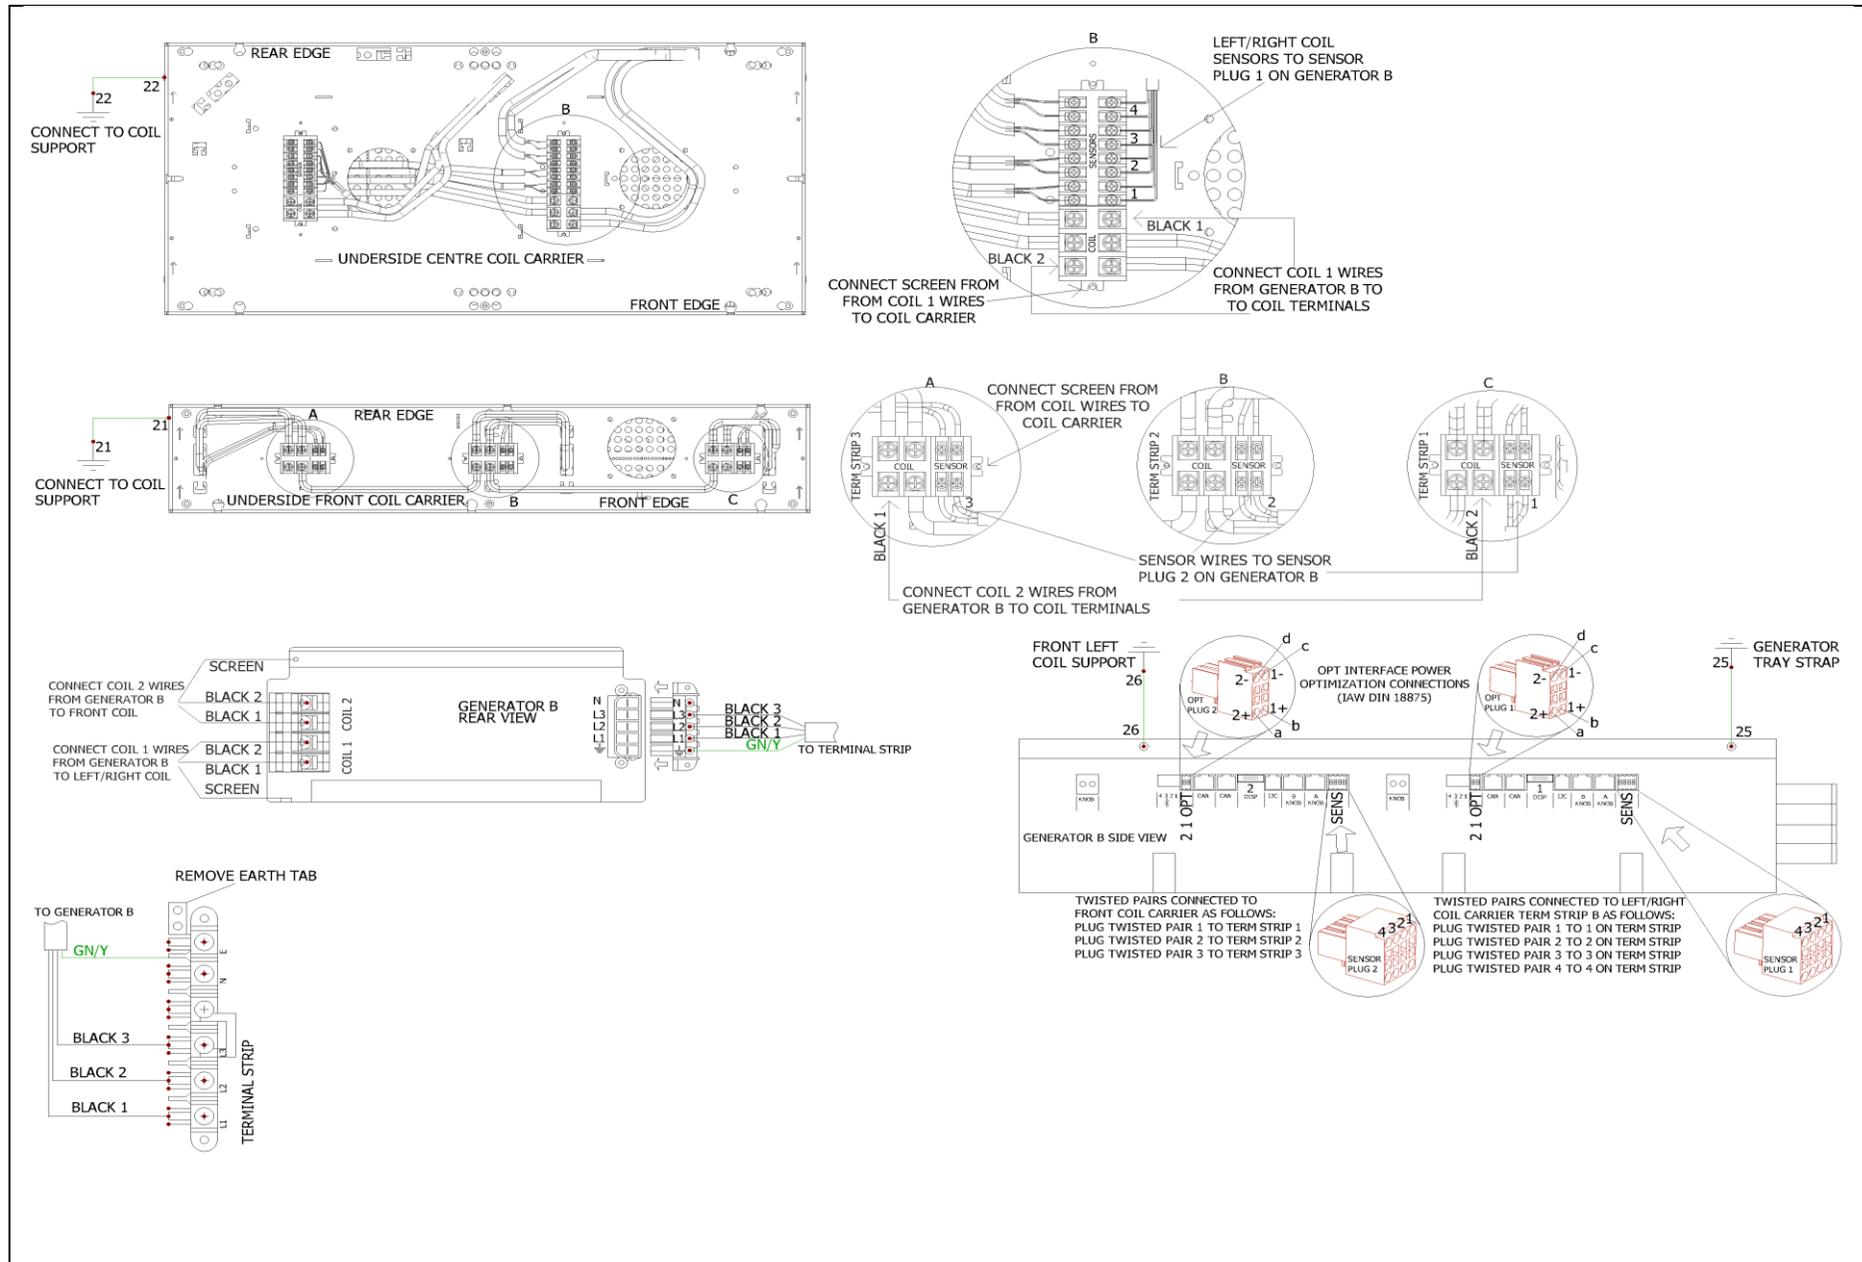


9.17.4 E3907i Control and data wiring diagram

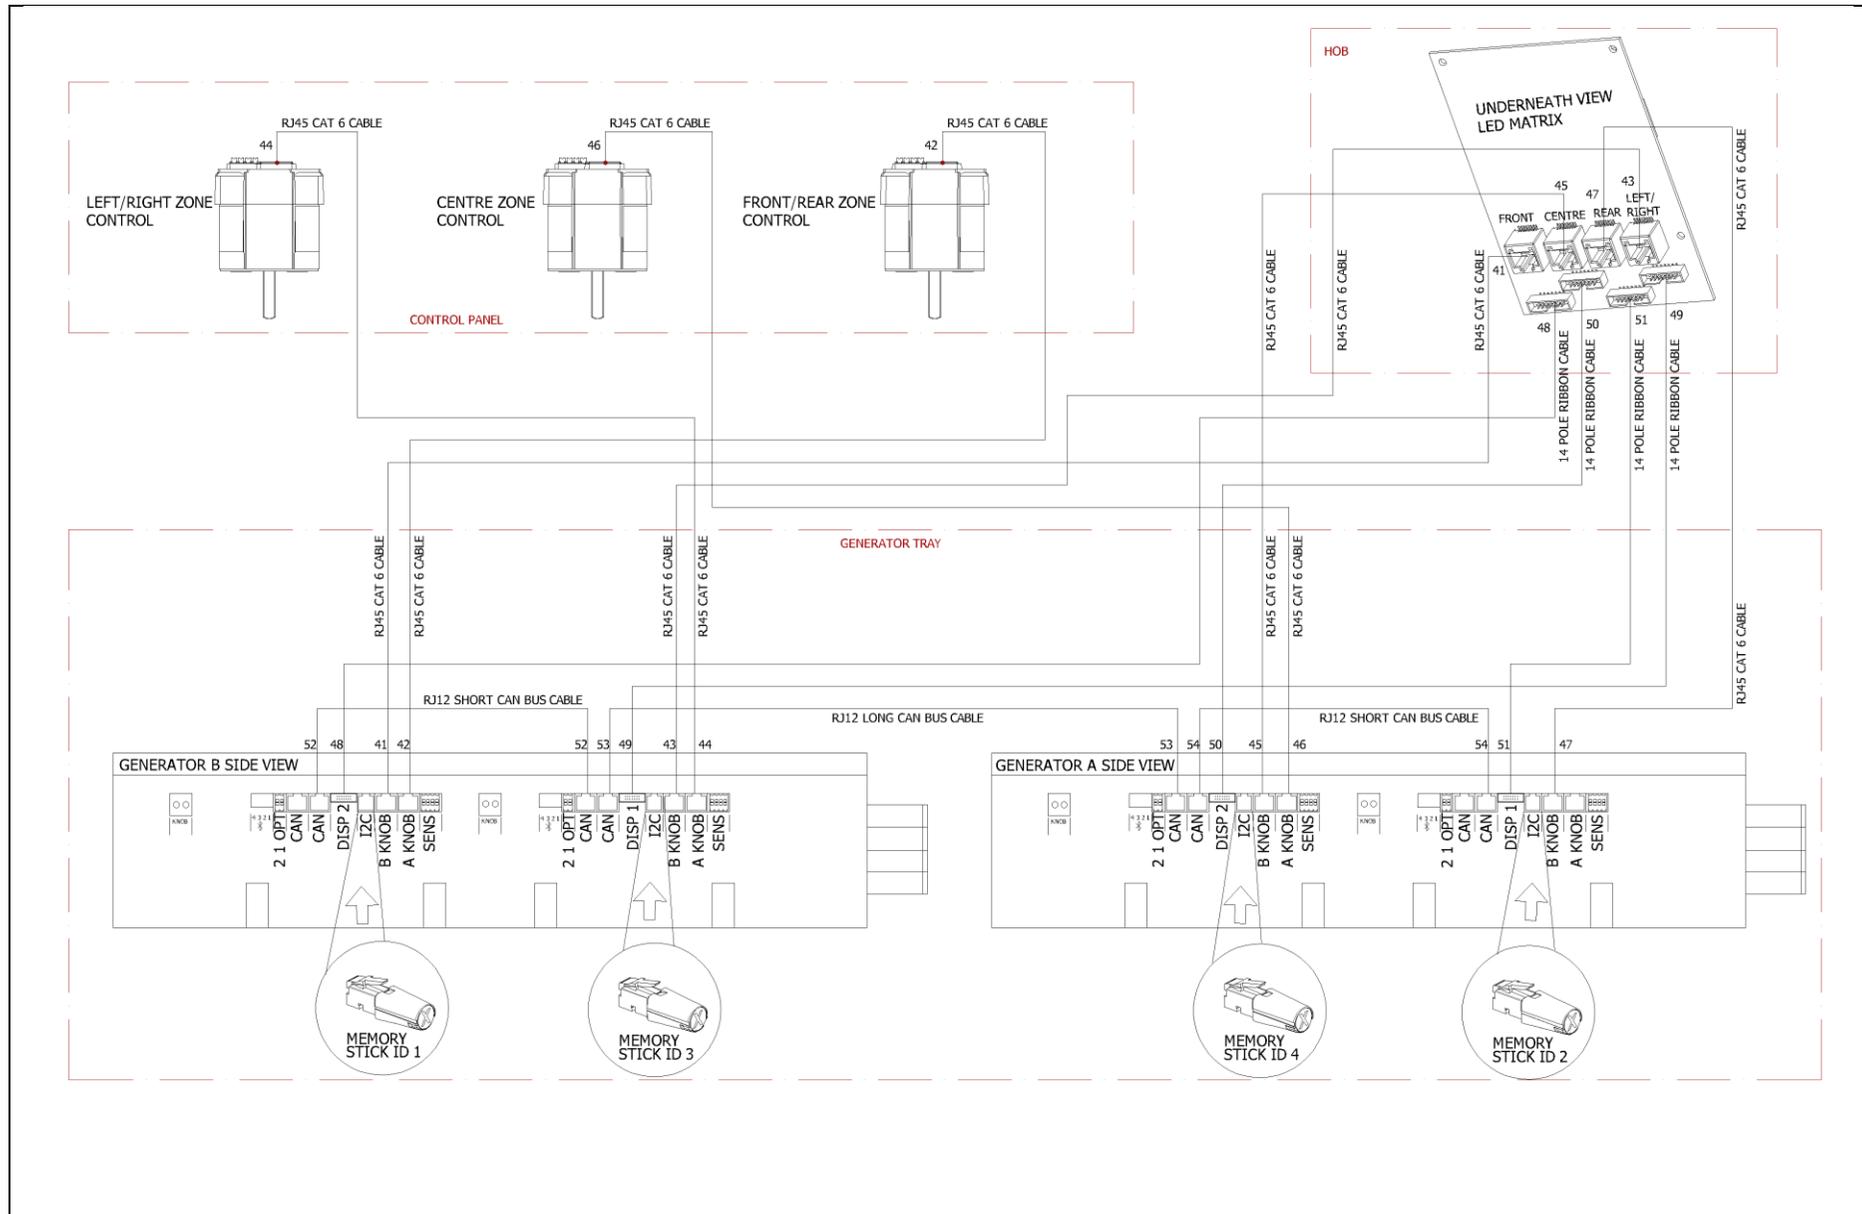

10.0 ACCESSORIES

10.1 ENERGY OPTIMIZATION KIT (DIN 18875)

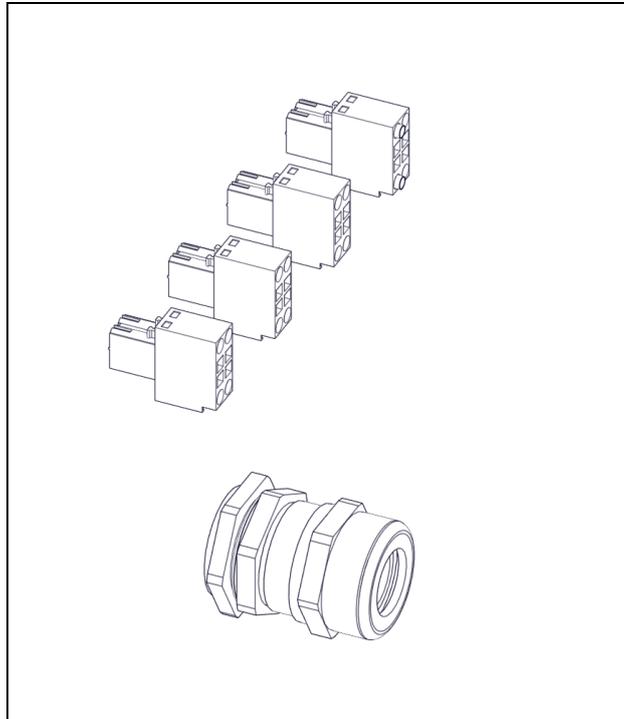

- Note(s)**
- a) 8-off 2 Core SIHF-J 0.34²mm cables assemblies would be also required. These are not supplied due variable length requirements.
 - b) See energy optimisation connection manual “T101083” for further wiring information.

11.0 FAULT FINDING

11.1 ERROR CODES

11.1.1 Most faults can be rectified by simply switching unit off for 10 seconds. After this time, turn power back on at mains supply. If fault continues to occur after such action, then please refer to the table. This will provide a solution to rectify the condition.

ERROR CODE	DESCRIPTION	POSSIBLE CAUSE OF ERROR	REMEDY
	Pan not detected	Wrong pot size, Wrong pot grade of material.	<ul style="list-style-type: none"> Put the wok / pan on the cooking zone. Use a bigger pan. Use suitable Induction pans. Use suitable Induction pans.
E02	Coil power is too strong		<ul style="list-style-type: none"> Use suitable Induction pans. Call engineer
E03	The maximum device temperature is exceeded.	Air supply to appliance is restricted	<ul style="list-style-type: none"> Let the appliance cool down. Check air filters are clean and air ducts are clear of any obstructions.
E04	Empty cooking protection is active.	Empty pans	<ul style="list-style-type: none"> Turn knob to zero position. Remove empty pans from hob. Allow hob to cool down.
E05	Fault in cooking level specification		<ul style="list-style-type: none"> Vary the knob settings to check wiring. operation.
E06	Expiry of the permitted hours of operation		<ul style="list-style-type: none"> Call the engineer.
E07	IGBT-temperature sensor – error		<ul style="list-style-type: none"> Call the engineer
E08	Device has excessive temperature	Air supply to appliance is restricted. Ambient temperature is too high. Overload of cooktop or empty boiled cookware	<ul style="list-style-type: none"> Let the appliance cool down. Check air filters are clean and air ducts are clear of any obstructions. Reduce number of pans on hob.
E09	The hob temperature from the pan detection is too hot	Air supply to appliance is restricted. Overload of cooktop or empty boiled cookware.	<ul style="list-style-type: none"> Let the appliance cool down.
E10	power supply under voltage (<180VAC)		<ul style="list-style-type: none"> Check the mains fuse. Ensure stable power supply

ERROR CODE	DESCRIPTION	POSSIBLE CAUSE OF ERROR	• REMEDY
E11	Communication error	Error/interruption of data bus	<ul style="list-style-type: none"> • Call the engineer
E12	Hob excessive temperature		<ul style="list-style-type: none"> • Reduce the cooking level. • Switch of appliance and let the appliance cool down. • ControlInduc® pans should not be used in continuous operation.
E13	Fault in temperature measure		<ul style="list-style-type: none"> • Call the engineer.
E14			<ul style="list-style-type: none"> • Call the engineer to contact the manufacturer.
E15	Mutual interaction of wo cooking fields		<ul style="list-style-type: none"> • Call the engineer.
E16			<ul style="list-style-type: none"> • Call the engineer.
E17	Current monitoring error		<ul style="list-style-type: none"> • Call the engineer.
E18			<ul style="list-style-type: none"> • Call the engineer.
E19	Connection error between coil and generator	<p>Control coil connection</p> <p>Control coil cable for interruption</p>	<ul style="list-style-type: none"> • Call the engineer.
E20	Safety shutdown due to discrepancy between security and main processor	No double release / interrupt power supply shortly	<ul style="list-style-type: none"> • Call the engineer.
E21	Application sensor gradient survey	<p>Power supply not corresponding to measured temperature change.</p> <p>Verify position of application sensor</p>	<ul style="list-style-type: none"> • Call the engineer.
E22	Application sensor connection error	<p>Control connection of external temperature sensor</p> <p>Change configuration of device</p>	<ul style="list-style-type: none"> • Call the engineer.

ERROR CODE	DESCRIPTION	POSSIBLE CAUSE OF ERROR	REMEDY
E23	Overload	Check mains voltage. Check the mains connection. Magnetic coupling to others Induction systems reduce.	<ul style="list-style-type: none"> • Call the engineer.
E31	Application sensor connection error	Check the connection of application-specific temperature sensor of coil A Change the configuration of the device.	<ul style="list-style-type: none"> • Call the engineer.
E32	Application sensor excess temperature	Turn off coil A and let cool down. Change the configuration of device	<ul style="list-style-type: none"> • Call the engineer.
E33	Connection-error coil temperature sensor	Check the wiring of the temperature sensor of Coil A Change the configuration of device	<ul style="list-style-type: none"> • Call the engineer.
E34	Coil excess temperature	Turn off the heating area of coil A and let cool down. Change the configuration of the device	<ul style="list-style-type: none"> • Call the engineer.
E41	Application sensor connection error	Check the connection of application application-specific temperature sensor of coil B. Change the configuration of the device.	<ul style="list-style-type: none"> • Call the engineer.
E42	Application sensor excess temperature	Turn off coil A and let cool down. Change the configuration of the device.	<ul style="list-style-type: none"> • Call the engineer.
E43	Connection-error coil temperature sensor	Check the wiring of the temperature sensor of Coil B Change the configuration of the device.	<ul style="list-style-type: none"> • Call the engineer.
E44	Coil excess temperature	Turn off the heating area of coil B and let cool down. Change the configuration of the device.	<ul style="list-style-type: none"> • Call the engineer.

ERROR CODE	DESCRIPTION	POSSIBLE CAUSE OF ERROR	• REMEDY
E50	Coil excess temperature	Turn off customer specific coil and let cool-down. Change the configuration of the device.	• Call the engineer.
E51	Connection-error coil temperature sensor	Check wiring of temperature sensor of customer-specific coil. Change the configuration of the device.	• Call the engineer.
E52	Pyrometer excess temperature	Turn off induction heating and let cool down. Change the configuration of the device.	• Call the engineer.
E53	Pyrometer connection error	Check wiring to infrared thermometer. Change the configuration of the device.	• Call the engineer.
E54	Application plug	Control application-specific plug-system.	• Call the engineer.
E55	Pyrometer gradient control	Power supply not corresponding to measured temperature change. Check position of pyrometer. Change the configuration of the device.	• Call the engineer.
E56	Ferrite excess temperature	Change the configuration of the device.	• Turn off device and let cool down. • If problem persists, call the engineer.
E57	Connection-error ferrite temperature-sensor	Check wiring of temperature sensor. Change the configuration of the device	• Call the engineer.
E58	Dynamic in temperature measuring too high	Control contacts of temperature sensor. Change the configuration of the device.	• Call the engineer.

ERROR CODE	DESCRIPTION	POSSIBLE CAUSE OF ERROR	REMEDY
	Protection of restart after disruption of current	Change the configuration of the device.	<ul style="list-style-type: none"> Turn the knob briefly off and select cooking level again. Call engineer
	High heat sink temperature	Insufficient air flow to generators.	<ul style="list-style-type: none"> Switch off the cooking zone and allow to cool down. Clean air filter trap
	Phase failure	Loss of phase on supply. Fuse failure.	<ul style="list-style-type: none"> Control power supply Check fuses
	Reduction of performance	Energy optimising active. Phase failure. Overheat control device active.	<ul style="list-style-type: none"> Call engineer. Turn off the cooking zone and allow it to cool.

FAULT	POSSIBLE CAUSES	REMEDY	USER	*ENG
Unit will not turn ON	No power to unit	Check mains power is connected and turned on	✓	
	Fuse has blown	Check the Fuse behind the cover panel (see section 9.3) and replace as necessary.		✓
Hob cooking zones will not operate	Switch at off position	Change the hob control knob to position 1	✓	
A reduction in performance on hob cooking zones.	Blocked air filter	Clean Air filter (See section 5.1.2)	✓	
	Damaged pot/pan	Replace pot/pan	✓	
Pot/pan slow to heat	Low			
	Poor quality induction pot/pan	Replace with quality induction pot/pan	✓	
	Faulty Induction heater	Call Engineer	✓	

PROBLEM	POSSIBLE CAUSES	REMEDY	USER	*ENG
Food keeps burning	The dial setting is too high	Lower dial setting	✓	

*ENG Service engineer only.

12.0 SPARE PARTS

PART DESCRIPTION
Power neon red
LED digital display pcb
Control panel
Control knob
Knob coding switch
Front hob cooling fan
Fuse
Capacitor
Rear hob cooling fan
Hob cooling thermostat
Generator A
Generator B
Memory Stick ID1
Memory Stick ID2
Memory Stick ID3
Memory Stick ID4
Induction Heater on Carrier (Front or Rear Zone)
Induction Heater on Carrier (Lh + Centre + Rh Zone)
Air Filter
Cable Gland

When ordering spare parts please quote the following:

Model Number

Serial number

This information will be found on data plate attached to the appliance.
Visit our website for further spares information.

13.0 SERVICE INFORMATION

This unit carries an extensive mainland UK warranty. The warranty is in addition to and does not change your statutory or legal rights.

The warranty policy can be found on our website which details the conditions of the warranty and the exclusions.

<https://www.falconfoodservice.com/info-centre/policy>



Service calls to equipment under warranty will be carried out in accordance with the conditions of sale.

Warranty calls can be made between 8:30 am and 5:00 pm weekdays only.

To ensure your warranty enquiry is handled as efficiently as possible, ensure you have the following appliance information prior to calling us:

1. Model number – found on data plate.
2. Serial number – found on data plate.
3. Brief description of the issue

To contact Falcon for a warranty issue dial (UK only) 01786 455 200 and select Warranty Issues from the menu.