


NAG161B

COMBI FOR CATERING AND LARGE BUSINESSES - 6 + 10 X 1/1 GN - 6 + 10 X EN1 (600 X 400) - GAS WITH DIRECT STEAM - STEAM GENERATOR OPTIONAL • TOUCH SCREEN CONTROLS - AUTOMATIC INTERACTIVE COOKING



The absolutely unique feature that distinguishes Naboo boosted from other professional combi ovens is called Nabook (patented). Thanks to the built-in Wi-Fi connection, you will have access to your virtual kitchen assistant and a myriad of other services (find out more on nabook.cloud).

Features



EFFICIENT

Energy monitor. VCS Vapor Cleaning System, new washing system. Reduction in detergent consumption up to 30% less.



SMART

Naboo Coach, the virtual assistant which provides advice on cooking, the best washing cycle and lets you know when maintenance is required. The exclusive Naboo boosted Autoclima controls the ideal climate, thus guaranteeing excellent cooking quality at all times.



STURDY

Long Life Component LLC. New long-lasting components. EMA Easy Maintenance Access to reduce service intervention times.



SMALL

Up to 15% less space by miniaturising the components (depending on model).



CONNECTED

With built-in Wi-Fi, Naboo boosted is always connected to Nabook Cloud, the comprehensive and free virtual kitchen assistant.



FLEXIBLE

Multilevel Plus. Configurable controls display. Editable recipes.



POWERFUL

Up to 20% more powerful. Pre-heating up to 320°C. Thanks to the new energy supply systems, Naboo boosted results in savings of up to 16% less compared to previous models.



QUICK

Broccoli in just 7 minutes. 24 chickens in 30 minutes (Ref. mod.101)



EMC



IPX5



Dimensions

Capacity - GN	6 x GN 1/1	
Capacity - EN	6 x EN (600 x 400)	
Distance between layers	mm 70	inch 2.8
Width	mm 852	inch 33.5
Depth	mm 795	inch 31.3
Height	mm 1840	inch 72.4
Packaging width	mm 1030	inch 40.6
Packing depth	mm 980	inch 38.6
Packaging height	mm 2040	inch 80.3
Net weight	kg 240	lbs 529.2
Gross weight	kg 279	lbs 615.2
Volume	m ³ 1.25	ft ³ 44.1
Packing volume	m ³ 2	ft ³ 70.6
Minimum installation clearance - left side	mm 50	inch 2.0
Minimum installation clearance - rear side	mm 50	inch 2.0
Minimum installation clearance - right side	mm 500	inch 19.7
Cooking compartment width	mm 459	inch 18.1
Cooking compartment depth	mm 650	inch 25.6
Cooking chamber height	mm (511+791)	inch NaN

Power supply

Voltage	["1N-AC 230 V"]	
Electrical absorption	A 6,1	
Frequency	Hz 50/60	
Total electric power	kW 1,4	
Gas versions nominal heating output - G20	kW / kcal 35 / 30100	
Differential switch, single-phase frequency converter	RCD cl. B	
Gas_Power	35	
Gas - Type	G20	
Gas versions nominal heating output - G20 (with steam generator)	kW / kcal 40 / 34400	
Steam heating power (with steam generator)	kW / kcal 32 / 27520	
Chamber heating output - G20	35 / 30100	
Min. gas pressure - G20	bar 0,018	
Max. gas pressure - G20	bar 0,025	

Gas supply

Gas - Type	G20	
Min. gas pressure - G20	bar 0,018	
Max. gas pressure - G20	bar 0,025	
Gas versions nominal heating output - G20	kW / kcal 35 / 30100	
Gas versions nominal heating output - G20 (with steam generator)	kW / kcal 40 / 34400	

Water Connection

Cold water inlet	3/4	
Softened water inlet	Ø	3/4
Min. pressure	bar	2
Max. pressure	bar	5
Minimum water flow	10	
Drainage slope	4°	
Discharge	50	

Water quality

Water hardness for steam generation connection	°dh / ppm 6° / 9° fH	
pH value	Ph	> 7,5
Cl (chloride) - max	mg / l	30 mg/l max
Cl2 (free chlorine)	mg / l	0,1 mg/l max
Fe (iron)	mg / l	0,1 mg/l max
NH2Cl (monochloramine)	mg / l	0,2
Max. cold water temperature	°C	30
Max. softened water temperature	°C	50
Electrical conductivity	µS	50 - 200

Emissions

Latent heat	W / kW	252
Sensitive heat	W / kW	210
Max. liquid discharge temperature	°C	85
Noisiness	db	< 50

Special voltages and frequencies on request

COOKING MODES

- SMOKEGRILL FOR BARBECUE SYSTEM (PATENTED), RECYCLABLE SMOKEESSENCE DISPENSER (OPTIONAL).
- PRE-HEATING AT 320°C.
- NIGHT COOKING. LOW TEMPERATURE NIGHT COOKING AND SUBSEQUENT HOLDING GUARANTEES PERFECT MATURATION OF THE MEAT WITH MINIMUM WEIGHT LOSS AND LOW POWER CONSUMPTION.
- JUST IN TIME (JIT) MODE - ALLOWS DIFFERENT FOODS TO BE TAKEN OUT OF THE OVEN AT THE SAME TIME. ALL WITH UTMOST ORGANISATION AND BEST RESULTS GUARANTEED, ALWAYS (PATENTED).
- MULTILEVEL MODE - POSSIBILITY TO COOK DIFFERENT FOODS SIMULTANEOUSLY WITH DIFFERENT COOKING TIMES.
- FAST-DRY BOOSTED® - AUTOMATIC SYSTEM FOR QUICK DEHUMIDIFICATION OF THE COOKING CHAMBER.
- AUTOCLIMA® - SYSTEM THAT AUTOMATICALLY MANAGES THE PERFECT CLIMATE IN THE COOKING CHAMBER.
- MULTILEVEL PLUS - THE MULTI-LEVEL FUNCTION ON EACH SHELF MEANS DOUBLING PRODUCTION CAPACITY (PATENTED).
- PROGRAMMABLE MODES: POSSIBILITY TO PROGRAMME AND SAVE A RECIPE WITH ITS COOKING METHODS IN AN AUTOMATIC SEQUENCE (UP TO 15 CYCLES) GIVING EACH PROGRAMME ITS OWN NAME, PICTURE AND INFORMATION ON THE RECIPE.
- MANUAL MODE WITH THREE COOKING MODES AND INSTANT COOKING START: CONVECTION FROM 30°C TO 300°C, STEAM FROM 30°C TO 130°C, COMBINATION CONVECTION + STEAM FROM 30°C TO 300°C.
- ICS (INTERACTIVE COOKING SYSTEM), AN AUTOMATIC COOKING SYSTEM FOR ITALIAN AND INTERNATIONAL RECIPES INCLUDING THEIR HISTORY, INGREDIENTS, COOKING ACCESSORY, PROCEDURE, AUTOMATIC COOKING PROGRAMME AND A PHOTOGRAPHIC PLATE PRESENTATION.

CONNECTIVITY BETWEEN NABOOO AND LAINOX CLOUD (PATENTED) - WI-FI OR ETHERNET

- POSSIBILITY TO RUN AUTOMATIC SOFTWARE UPDATES ON MULTIPLE DEVICES SIMULTANEOUSLY.
- NABOOO - THANKS TO THE CLOUD FEATURE, IT IS POSSIBLE TO ACCESS NABOOO, THE VIRTUAL KITCHEN ASSISTANT (READ MORE ON NABOOO CLOUD, FREE REGISTRATION).
- POSSIBILITY TO DOWNLOAD RECIPES FROM THE NABOOO PORTAL BASED ON COUNTRY.
- LMS, LAINOX MULTIDISPLAY SYSTEM - THANKS TO THE NABOOO PORTAL AND THE NEW LMS, YOU CAN CONFIGURE YOUR DEVICES AND SYNCHRONISE YOUR RECIPES IN A DIFFERENT WAY FOR EACH NABOOO.
- REMOTE CONSUMPTION MONITORING.
- AUTOMATIC SOFTWARE UPDATE NOTIFICATION SYSTEM.
- REMOTE DIAGNOSIS THROUGH THE NABOOO PORTAL BY THE LAINOX SERVICE CENTER.
- CONTINUOUS HACCP MONITORING EVEN BY REMOTE THROUGH THE NABOOO PORTAL.
- SYNCHRONISATION OF DEVICES CONNECTED TO THE SAME ACCOUNT (PATENTED).
- ORGANISATION OF SHOPPING LIST TO EXPORT IN WORD FORMAT.
- FOOD COST CALCULATION OF RECIPES AND SINGLE PORTION MENUS.
- MENU CREATION WITH CALORIE COUNT AND LIST OF ALLERGENS WITH LAYOUT FOR CUSTOMISED PRINT OUT.
- DIRECT ACCESS FROM COOKING DEVICE TO RECIPE DATABASE, WITH OPTIONAL DOWNLOAD (PATENTED).
- RECIPE CREATION INCLUDING INGREDIENTS WITH PROCEDURE AND PHOTO.

CONTROL MECHANISMS

- SLCV / SLCS - SMART CHEMICALS CONTROL - PRECISELY CONTROLS DETERGENT CONSUMPTION, ALERTING YOU WHEN IT IS ABOUT TO RUN OUT AND SUGGESTING THE SUITABLE WASH FOR THE AMOUNT OF RESIDUAL DETERGENT.
- MULTIPOINT CORE PROBE WITH EXTERNAL CONNECTOR, Ø 3 MM.
- TURBOVAPOR - WITH THE TURBOVAPOR SYSTEM THE IDEAL LEVEL OF STEAM IS AUTOMATICALLY PRODUCED TO COOK "TOUGH" PRODUCTS LIKE EGG PASTA OR ASPARAGUS, TURNIP GREENS AND CHARD, WHICH ARE NOTORIOUSLY FIBROUS VEGETABLES (FOR MODEL WITH STEAM GENERATOR).
- INTELLIGENT ENERGY SYSTEM - BASED ON THE QUANTITY AND TYPE OF PRODUCT, THE OVEN OPTIMISES AND CONTROLS THE ENERGY OUTPUT, MAINTAINING THE BEST COOKING TEMPERATURE AND AVOIDING FLUCTUATIONS.
- USER PROFILE BLOCK (SPECIFIC FUNCTION FOR QUICK SERVICE RESTAURANT - QSR).
- POSSIBILITY TO PROGRAMME STAGGERED COOKING TIMES BY DATE AND TIME.
- REMINDER TO CLEAN AIR FILTERS.
- EXTERNAL WATER-SOFTENER'S EFFICIENCY MONITORING SYSTEM (WATER-SOFTENER OPTIONAL).
- LOW CONSUMPTION LED COOKING CHAMBER LIGHTING. OPTIMAL VISIBILITY IN ALL POINTS OF THE COOKING CHAMBER. NEUTRAL LIGHT THAT DOESN'T ALTER THE ORIGINAL COLOURS OF THE PRODUCT.
- ECOVAPOR - WITH THE ECOVAPOR SYSTEM, THERE IS A NET REDUCTION IN WATER AND ENERGY CONSUMPTION DUE TO THE AUTOMATIC CONTROLS OF THE STEAM SATURATION IN THE COOKING CHAMBER.
- SELF-DIAGNOSIS BEFORE STARTING TO USE THE EQUIPMENT, WITH DESCRIPTIVE AND AUDIBLE SIGNALLING OF ANY ANOMALIES.
- ENERGY MONITOR - MONITORING SYSTEM OF ENERGY, GAS, WATER, CLEANING CHEMICALS.
- SERVICE PROGRAM: TESTING THE OPERATION OF THE ELECTRONIC BOARD - DISPLAY OF THE TEMPERATURE PROBES - COUNTER FOR OPERATING HOURS OF ALL PRIMARY FUNCTIONS FOR PROGRAMMED MAINTENANCE.
- PRE-CONFIGURED SN ENERGY OPTIMISATION SYSTEM (OPTIONAL).
- POSSIBILITY OF SETTING COMBI SWITCH-OFF AT THE END OF THE AUTOMATIC WASH PROGRAM.
- USB CONNECTION TO DOWNLOAD HACCP DATA, UPDATE SOFTWARE AND LOAD/DOWNLOAD COOKING PROGRAMMES.
- 2 CORE PROBE (OPTIONAL).
- TEMPERATURE CONTROL AT THE PRODUCT CORE USING PROBE WITH 4 DETECTION POINTS.
- ABILITY TO CHOOSE UP TO 6 FAN SPEEDS; THE FIRST 3 SPEEDS AUTOMATICALLY TRIGGER A REDUCTION IN HEATING POWER. FOR SPECIAL COOKING METHODS, YOU CAN USE AN INTERMITTENT SPEED.
- EASY ACCESS TO PROGRAMMABLE USER PARAMETERS TO CUSTOMISE THE APPLIANCE THROUGH THE USER MENU.
- AUTOMATICALLY REGULATED STEAM CONDENSATION.
- AUTOMATIC PARALLEL COMPARTMENT AND CORE TEMPERATURE CONTROL, DELTA T SYSTEM.
- AUTO REVERSE (AUTOMATIC REVERSE OF FAN ROTATION) FOR PERFECT COOKING UNIFORMITY.
- SMART DIAGNOSTIC SYSTEM - FUNCTIONAL DIAGNOSTICS TO ALWAYS HAVE YOUR EQUIPMENT AT ITS MAXIMUM PERFORMANCE.
- SLS - SMART LIGHTING SYSTEM - VISUAL COMMUNICATION THAT ALLOWS YOU TO UNDERSTAND, WITH JUST ONE GLANCE, WHEN WORK NEEDS TO BE DONE (OPTIONAL).
- SWITCH MODE POWER SUPPLY - NEW HIGHLY EFFICIENT SWITCH MODE POWER SYSTEM.

CONSTRUCTION

- LONG LIFE COMPONENT LLC - USE OF NEW LONG-LASTING COMPONENTS (LAINOX INTERNAL APPROVAL PROCEDURE).
- PUSH-TO-CLOSE DOOR AND HANDLE WITH RIGHT OR LEFT OPENING.
- FORCED VENTILATION ELECTRONICS COOLING SYSTEM WITH STAINLESS STEEL MICRO-EXPANDED MESH PROTECTIVE FILTER, EASY TO REMOVE AND DISHWASHER SAFE.
- SOLID STATE RELAY FOR POWER OPTIMISATION AND MODULATION.
- COMPACT BRUSHLESS MAGNETIC DRIVE MOTORS.
- FULL AISI 304 COMBI.
- TWO WATER INLETS (SOFT AND COLD WATER).
- FRONT REMOVABLE CONTROL PANEL FOR EASY SERVICING.
- BUILT-IN DOOR DRIP TRAY COLLECTING THE CONDENSATE INTO THE OVEN DRIP TRAY; THEN INTO THE OVEN DRAIN.
- NEW PUSH-IN ADAPTABLE DOVE-TAIL JOINT SEAL FOR OVEN FRONT PANEL MADE WITH HEAT AND AGE RESISTANT SILICON RUBBER, EASY TO REPLACE.
- COOKING CHAMBER IN 1 MM THICK 18/10 AISI 304 STAINLESS STEEL WITH LONG FULLY ROUNDED EDGES FOR BEST AIR FLOW AND EASIER CLEANING.
- DEFLECTOR THAT CAN BE OPENED FOR EASY FAN COMPARTMENT CLEANING.
- ADJUSTABLE HINGE FOR OPTIMAL SEAL.
- INTERNAL GLASS THAT FOLDS TO OPEN FOR EASY CLEANING.
- DOOR WITH REAR VENTILATED DOUBLE TEMPERED GLASS WITH AIR CHAMBER AND INTERIOR HEAT-REFLECTING GLASS FOR LESS HEAT RADIATION TOWARDS THE OPERATOR AND GREATER EFFICIENCY.
- PERFECTLY SMOOTH, WATERTIGHT CHAMBER.

OPERATION

- NABOO COACH (VIRTUAL ASSISTANT). WARNINGS ON DISPLAY INDICATING NEED FOR MAINTENANCE.
- POSSIBILITY TO VIEW AND MODIFY THE RECIPE AT ANY TIME.
- NABOO COMES WITH 227 RECIPES. WITH HUNDREDS MORE AVAILABLE BY ACCESSING THE NABOOK PORTAL. EACH RECIPE HAS BEEN TESTED TO GUARANTEE BEST RESULTS.
- USER INTERFACE WITH A CHOICE OF 29 LANGUAGES.
- ACOUSTIC AND VISUAL SIGNALLING DURING THE VARIOUS STAGES OF COOKING, WITH A FLASHING LIGHT AT THE END OF THE CYCLE.
- MANUAL HUMIDIFIER.
- RAPID COOLING WITH POSSIBLE INJECTION OF WATER INTO THE COOKING CHAMBER.
- AUTOMATIC RESUMPTION OF COOKING IN CASE OF A POWER FAILURE.
- COOL DOWN FUNCTION FOR THE RAPID FAN-COOLING OF THE COOKING CHAMBER.
- BOOSTED PRE-HEATING. POSSIBILITY TO PRE-HEAT THE COOKING CHAMBER UP TO 320°C TO REDUCE COOKING TIMES BY UP TO 10% IN CASE OF A FULL OVEN.
- INSTANTANEOUS DISPLAY IN ICS COOKING OF THE HACCP GRAPHIC.
- 10" COLOUR SCREEN (LCD, HIGH DEFINITION, CAPACITIVE, WITH "TOUCH SCREEN" FUNCTIONS).
- INTELLIGENT RECOGNITION OF RECIPES IN MULTILEVEL FOLDERS.
- ORGANISATION OF RECIPES IN FOLDERS WITH PREVIEW, GIVING EACH FOLDER ITS OWN NAME.
- AUTOMATIC "ONE TOUCH" COOKING (ICS).
- DISPLAY THAT CAN BE CONFIGURED BASED ON THE NEEDS OF THE USER, BRINGING FORWARD THE PROGRAMMES USED MOST.

GAS OPERATION

- HIGH EFFICIENCY HEAT EXCHANGER WITH STEEL EXPANSION CABINET
- COOKING CHAMBER HIGH-PERFORMANCE INDIRECT GAS HEATING SYSTEM WITH PREMIXED AIR-BLOWN MODULATING FLAME BURNERS.
- ELECTRONIC CONTROL OF THE FLAME WITH AUTOMATIC IGNITION RESET.
- AUTOMATIC BURNER IGNITION WITH HIGH-FREQUENCY ELECTRONIC DISCHARGE GENERATOR.

STEAM GENERATION - DIRECT

- DIRECT COOKING CHAMBER STEAM GENERATION SYSTEM WITH WATER INJECTION DIRECTLY ON THE FAN AND NEBULIZATION ON THE HEATING ELEMENTS. ADVANTAGE: IMMEDIATE AVAILABILITY OF STEAM IN THE COOKING CHAMBER.

STEAM GENERATION - INDIRECT (WITH STEAM GENERATOR)

- STEAM GENERATOR HIGH-PERFORMANCE INDIRECT GAS HEATING SYSTEM WITH NEW AIR-BLOWN MODULATING FLAME BURNERS.
- NEW FULLY INSULATED STEAM GENERATOR IN AISI 316 STAINLESS STEEL.
- CAL-OUT SYSTEM TO PREVENT SCALE BUILD-UP WITHIN THE BOILER, AS STANDARD.
- BOILER SEMI-AUTOMATIC DE-SCALING PROGRAM.
- ALARM IN CASE OF BOILER DE-SCALING REQUIRED.
- DAILY AUTOMATIC BOILER DRAINING AND RINSING, TEMPERATURE OF DRAINED WATER BELOW 60°C.
- AUTOMATIC BOILER PRE-HEATING.

SAFETY FEATURES

- IN CASE OF A POWER FAILURE DURING WASHING, HYGIENE IS ALWAYS GUARANTEED INsofar AS THE WASHING CYCLE IS AUTOMATICALLY RESUMED.
- MAXIMUM LAST TRAY SHELF HEIGHT 160 CM (WITH ROLLERS OPTION).
- COMPLIES WITH NATIONAL AND INTERNATIONAL STANDARDS FOR SAFE OPERATION IN CASE OF USE WITHOUT DIRECT OPERATOR SUPERVISION - IEC 60335-1 / IEC 60335-2-102 - EN203-1 / EN203-2-2
- MAX 65°C EXTERNAL TEMPERATURE ON THE DOOR PANEL.
- FAN MOTOR BRAKE.
- GAS SHORTAGE- SAFETY PRESSURE SWITCH.
- BOILER PROBE TO CHECK BOILER COMPLETELY EMPTY.
- AUTOMATIC ELECTRONIC CONTROL OF WATER LEVEL IN THE STEAM GENERATOR DURING FILLING AND DRAINING.
- STEAM GENERATOR TEMPERATURE LIMITER.
- ELECTRONICALLY CONTROLLED TWO-STAGE GAS VALVES.
- SAFETY PRESSURE SWITCH FOR LACK OF GAS ALARM.
- ELECTRONIC FLAME DETECTION SENSOR THAT INTERRUPTS THE GAS FLOW IF THE BURNER FLAME IS ACCIDENTALLY SWITCHED OFF.
- VENTILATED COMPONENT COOLING SYSTEM WITH ELECTRONICALLY CONTROLLED OVER-TEMPERATURE DISPLAY.
- SELF-DIAGNOSIS WITH SMART ERROR VIEWING.
- ELECTRONIC CONTROL FOR LACK OF WATER ALARM.
- DOOR OPEN/CLOSED ELECTRONIC SENSOR.
- FAN MOTOR THERMIC PROTECTION.
- COOKING COMPARTMENT SAFETY DEVICE FOR PRESSURE BUILT-UP AND DEPRESSION.
- COOKING CHAMBER TEMPERATURE LIMITER.

CLEANING AND MAINTENANCE

- CALOUT DESCALING SYSTEM THAT PREVENTS THE FORMATION AND ACCUMULATION OF LIMESCALE IN THE STEAM GENERATOR (FOR MODEL WITH STEAM GENERATOR). SEPARATE CONTAINER AND AUTOMATIC DISPENSING (CALFREE BOOSTED LIQUID DESCALER). SUPPLIED WITH 1 LIQUID DESCALER TANK - 990 GR.

- VCS - VAPOR CLEANING SYSTEM. NEW AUTOMATIC WASHING SYSTEM WITH VAPORISATION OF THE DETERGENT IN THE COOKING CHAMBER. ALLOWS A SIGNIFICANT REDUCTION IN DETERGENT CONSUMPTION UP TO 30%. SEPARATE CONTAINER AND AUTOMATIC DISPENSING (COMBICLEAN BOOSTED LIQUID CLEANSER). SUPPLIED WITH COMBIBLUE, ALKALINE SANITISING DETERGENT FOR STARTING PROFESSIONAL OVENS (990 GR).
- EASY EXTERNAL CLEANING THANKS TO PERFECTLY SMOOTH SURFACES IN STAINLESS STEEL AND GLASS AND IPX5 PROTECTION AGAINST WATER SPLASHES.
- "FAST" ULTRA-FAST WASHING IN 10'. MINIMUM INTERRUPTIONS TO THE WORK CYCLE AND CONSISTENTLY OPTIMAL CLEANING.
- 7 AUTOMATIC WASHING PROGRAMMES WITHOUT THE NEED FOR OPERATOR INPUT AFTER START-UP: MANUAL - RINSE - FAST - SOFT - MEDIUM ECO - HARD ECO - GRILL.
- WMS - WASH MANAGEMENT SYSTEM. SYSTEM ALLOWING WASHING PROGRAMMES TO BE PLANNED BASED ON COMBI USE.
- MANUAL CLEANING SYSTEM WITH RETRACTABLE HAND-HELD SHOWER.

INSTALLATION & ENVIRONMENT

- IT IS RECOMMENDED TO HAVE PERIODIC MAINTENANCE CARRIED OUT BY A LAINOX SERVICE CENTER IN ACCORDANCE WITH THE MANUFACTURER'S RECOMMENDATIONS AND AS STATED IN THE MAINTENANCE MANUAL AND WARRANTY.
- OPERATION WITHOUT ADDING THE WATER SOFTENER AND DESCALER (MODEL WITH STEAM GENERATOR).
- IT IS RECOMMENDED TO HAVE THE EQUIPMENT INSTALLED BY LAINOX ACCREDITED SERVICE CENTERS.
- QUALITY ISO 9001 / SAFETY ISO 45001 / ENVIRONMENTAL ISO 14001 CERTIFICATION.
- PRODUCT RECYCLING RATE 90%.
- LCP - LIFE CYCLE PERSPECTIVE: CO2 CONSUMPTION - 380 KG CO2 EQ/YEAR. THE CALCULATION WAS PERFORMED TAKING MOD. _E101B (MODEL WITH STEAM GENERATOR), TAKING INTO ACCOUNT A HYPOTHETICAL RESTAURANT USE AND CONSIDERING 8 HOURS A DAY FOR 3.5 DAYS A WEEK, FORTY-EIGHT DAY PER YEAR.
- 100% RECYCLABLE PACKAGING.

STANDARD EQUIPMENT


- USB CONNECTION
- WI-FI CONNECTION
- CALOUT DESCALING SYSTEM FOR MODELS WITH BOILER. SUPPLIED WITH ANTI-SCALE PRODUCT
- MULTIPPOINT CORE PROBE Ø 3 MM. WITH EXTERNAL CONNECTOR
- BUILT-IN AND RETRACTABLE HAND SHOWER WITH TAP
- AUTOMATIC CLEANING SYSTEM.
- PAIR OF SHELF RACKS - GN 1/1 - EN1 (600 X 400)
- PAIR OF SHELF RACKS - GN 1/1 - EN1 (600 X 400)

OPTIONAL TO BE REQUESTED WHEN ORDERING

SPP110: EXTRA CHARGE FOR SHELF RACKS - GN 1/1 - BGP110
SPP611: EXTRA CHARGE FOR SHELF RACKS - GN 1/1 - BGP611
NPS2: RIGHT HINGED DOOR, EQUIPPED WITH MULTIPOINT CORE PROBE WITH EXTERNAL CONNECTOR, Ø 3 MM
RL04: CASTORS OPTION. MAX HEIGHT 1875 MM - MAX WIDTH 913 MM
SPP864: EXTRA CHARGE FOR SHELF RACKS - EN1 (600 X 400) - BGP864
SSB864: EXTRA CHARGE FOR PASTRY VERSION REMOVABLE RACK SBE864 + COMPULSORY FRAME BTL011
SSB101: EXTRA CHARGE FOR REMOVABLE RACK SBE101 + COMPULSORY FRAME BTL011
SPP564: EXTRA CHARGE FOR SHELF RACKS - EN1 (600 X 400) - BGP564
SSP101: EXTRA CHARGE FOR REMOVABLE PLATE RACKS COMPLETE WITH COMPULSORY FRAME
SSP061: EXTRA CHARGE FOR REMOVABLE PLATE RACKS COMPLETE WITH COMPULSORY FRAME
SSB564: EXTRA CHARGE FOR PASTRY VERSION REMOVABLE RACK SBE564 + COMPULSORY FRAME BTL011
SSB061: EXTRA CHARGE FOR REMOVABLE RACK SBE061 + COMPULSORY FRAME BTL011
APD52: DOUBLE RELEASE DOOR OPENING
DSP2: DISPLAY-CONTROL PANEL PROTECTION
RL161: ROLLER KIT OPTION. MAX HEIGHT 1730 MM - HEIGHT INSERTION OF LAST TRAY 160 CM
OB161G: STEAM GENERATOR, FOR BOTH GAS MODELS
OCBM2: ISOLATION TRANSFORMER FOR TWO-PHASE/SINGLE PHASE CONNECTION FOR GAS MODELS 2AC 220-240V/1IN AC 230V
SLCS2: SMART CHEMICAL CONTROL - FOR STEAM GENERATOR MODELS
SLCV2: SMART CHEMICAL CONTROL - FOR DIRECT STEAM MODELS
NETH2: EXTRA CHARGE FOR ETHERNET CONNECTION
NSGB161: INNOVATIVE SMOKEGRILL FOR BARBECUE SYSTEM
KPG161: CHICKEN GRILL KIT PROFESSIONAL
OM161G: STEAM GENERATOR, FOR GAS MODEL, LOWER OVEN
SL503: SMART LIGHTING SYSTEM - CHROMATIC COMMUNICATION

EXTRA ACCESSORIES THAT CAN BE INSTALLED FOLLOWING PURCHASE

AFFE: SMOKER WITH EXTERNAL POWER SUPPLY
BAP161: STAINLESS STEEL HEAT SHIELD FOR THE UNIT SIDE PANEL
KNC: HYDRAULIC CONNECTION KIT, CONSISTING OF 2 INLET PIPES, 2 M AND Ø 50 MM DRAINAGE PIPING
PCSM: FLOWMETER 10-100
PCSF: PURITY C STEAM 1100 CARTRIDGE
PCSK: PURITY C STEAM FILTER HEAD KIT
PLG3016: PLUG - 230 V - 16A - 2P+T
SPDP: DETERGENT CONTAINER - CAPACITY 1 TANK OF 10 KG. - TO BE INSTALLED ON THE WALL
CPD20: DETERGENT CONTAINER - CAPACITY 2 TANKS OF 10 KG.
KSM002: MULTIPROBES SYSTEM, 2 MULTIPOINT CORE PROBES. Ø 3 MM
KSA001: NEEDLE CORE PROBE Ø 1 MM.
KSC180: MULTIPOINT CORE PROBE FOR LARGE ITEMS Ø 3 MM, PIN LENGTH 180 MM.
KSC004R: MULTIPOINT CORE PROBE Ø 3 MM.
BKQ161L: KIT BANQUETING - BCR161L + BPP061 + BPP101 + BCT061 + BCT101 - BTL011 X 2 NOT INCLUDED - FOR OVEN ON ROLLERS
SBE864: REMOVABLE RACK - TO BE USED WITH COMPULSORY FRAME - EN (600 X 400) VERSION
SBE101: REMOVABLE RACK - TO BE USED WITH COMPULSORY FRAME - GN VERSION
BPP101: REMOVABLE PLATE RACKS - TO BE USED WITH COMPULSORY FRAME
BCT101: RACK THERMAL COVER
BCT061: RACK THERMAL COVER
BPP061: REMOVABLE PLATE RACKS - TO BE USED WITH COMPULSORY FRAME
BTL011: COMPULSORY FRAME FOR REMOVABLE OVEN RACK AND PLATE RACKS
BCR161L: HEIGHT-ADJUSTABLE TROLLEY FOR REMOVABLE OVEN RACKS WITH DRIP TRAY, AND SYSTEM FOR COUPLING / UNCOUPLING FROM OVEN COOKING CHAMBER - FOR OVEN ON ROLLERS
BCR161S: HEIGHT-ADJUSTABLE TROLLEY FOR REMOVABLE OVEN RACKS WITH DRIP TRAY, AND SYSTEM FOR COUPLING / UNCOUPLING FROM OVEN COOKING CHAMBER - FOR OVEN ON FEET OR CASTOR
BFX161: FAT FILTER - 2 PCS.
BKQ161S: KIT BANQUETING - BCR161S + BPP061 + BPP101 + BCT061 + BCT101 - BTL011 X 2 NOT INCLUDED - FOR OVEN ON FEET OR CASTOR
SBE564: REMOVABLE RACK - TO BE USED WITH COMPULSORY FRAME - EN (600 X 400) VERSION
SBE061: REMOVABLE RACK - TO BE USED WITH COMPULSORY FRAME - GN VERSION
CBL3015: CABLE - 3 MT - 3 X 1,5 MMQ
BGP811: PAIR OF SHELF RACKS - GN 1/1
BGP110: PAIR OF SHELF RACKS - GN 1/1
SMKESL: SMOKEGRILL / SMOKING - 5 L.
CVC02: CONDENSATION STEAM CONVEYOR KIT
DL002BT: COMBICLEAN BOOSTED - 3 IN 1 ALKALINE CLEANSER - 2 CANISTERS OF 10 KG EACH
DL010BT: COMBICLEAN BOOSTED - 3 IN 1 ALKALINE CLEANSER - 10 CANISTERS OF 10 KG EACH
DL060BT: COMBICLEAN BOOSTED - 3 IN 1 ALKALINE CLEANSER - 60 CANISTERS OF 10 KG EACH
CF002BT: CALFREE BOOSTED - ANTI-SCALE - 2 CANISTERS OF 10 KG EACH
CF010BT: CALFREE BOOSTED - ANTI-SCALE - 10 CANISTERS OF 10 KG EACH
CF060BT: CALFREE BOOSTED - ANTI-SCALE - 60 CANISTERS OF 10 KG EACH
DS002BT: COMBIBOILER BOOSTED - ACID DESCALER - 2 CANISTERS OF 10 L EACH
DL001BT: COMBICLEAN BOOSTED - 3 IN 1 ALKALINE CLEANSER - 1 CANISTER OF 10 KG
CF001BT: CALFREE BOOSTED - ANTI-SCALE - 1 CANISTER OF 10 KG
DS001BT: COMBIBOILER BOOSTED - ACID DESCALER - 1 CANISTER OF 10 L
BGP564: PAIR OF SHELF RACKS - EN1 (600 X 400)
BGP864: PAIR OF SHELF RACKS - EN1 (600 X 400)
BGP611F: PAIR OF SHELF RACKS - GN 1/1 - EN1 (600 X 400)
BGP110F: PAIR OF SHELF RACKS - GN 1/1 - EN1 (600 X 400)

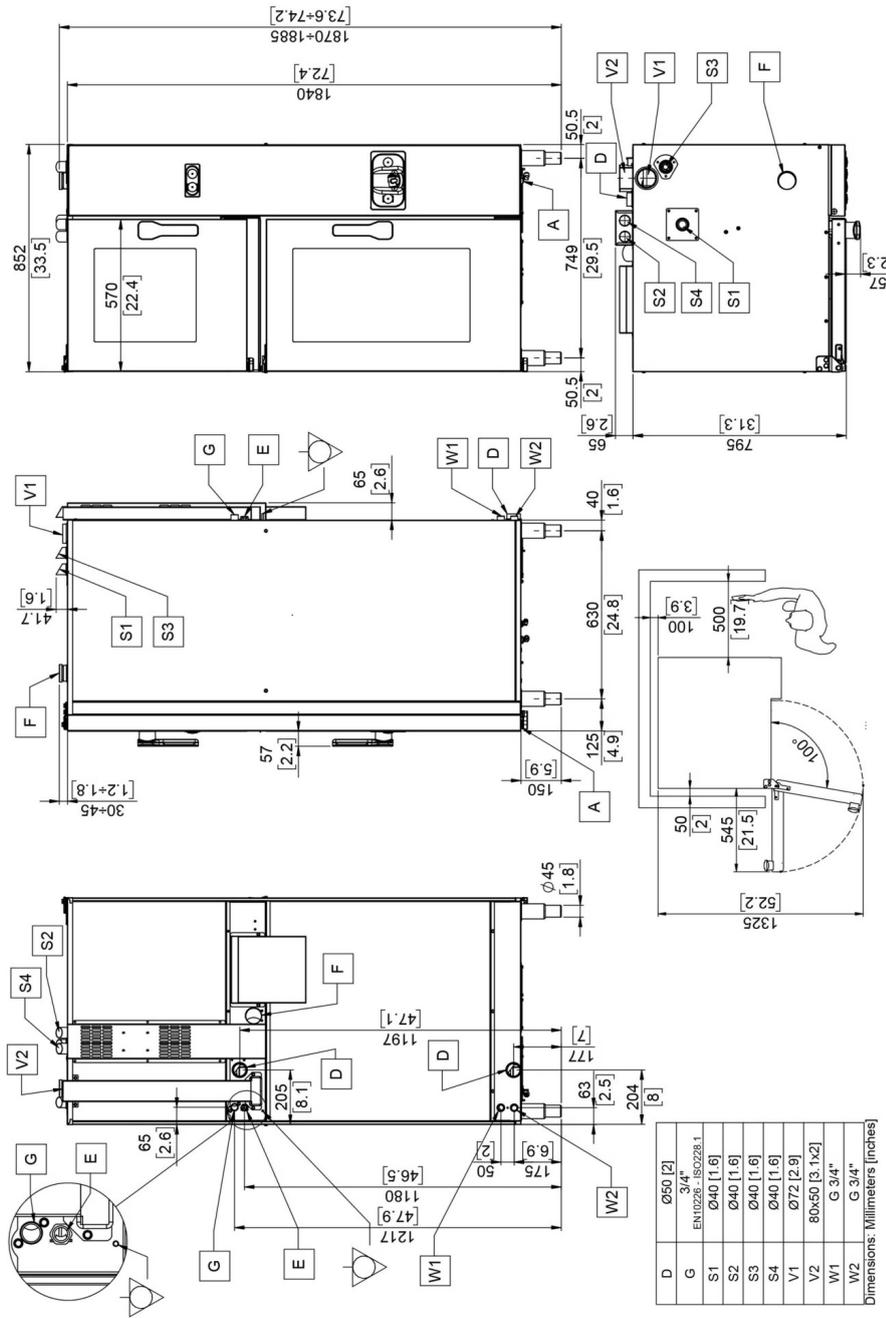

A	Technical compartment cooling air intake	D	Liquid discharge	E	Electric power supply, cable inlet	F	Cooking chamber air intake
G	Gas inlet	S1	Cooking chamber fumes exhaust	S2	Cooking chamber fumes exhaust	S3*	Steam generator fumes exhaust
S4*	Steam generator fumes exhaust	V	Steam vent and cooking chamber pressure drop safety device	W1	Water inlet	W2	Softened water inlet
Equipotential connection							

The data reported in this document is to be considered non-binding. The company reserves the right to make changes at any time, without prior notice. According to CE rules, gas ovens must be installed where proper evacuation of burnt gas can be provided (type B13, B23, A3)



Lainox Ali Group S.r.l.
Via Schiaparelli 15
Z.I. S. Giacomo di Veglia
31029 Vittorio Veneto (TV) - Italy

Tel +39 0438 9110
Fax +39 0438 912300
lainox@lainox.com
www.lainox.com



27/10/2023