

D Range

undercounter

DISHWASHER



D525 ws

Maidaid **D525 WS** Features

- **2 year warranty**
- Four button bright LED display with soft touch controls, twin traffic lights giving instant status updates & operational self-diagnostics



- Alarms menu with hi-level information retrieval
- Quick release parallel wash & rinse arm design
- Internal continuous water softener as standard
- Triple wash tank filtration system
- Breaktank as standard
- Drain pump as standard
- Three standard cycle time options with a range of special cycles
- Cycle times can be tailored to site requirements
- Comprehensive automatic self-cleaning at end of service
- Selectable energy saving mode
- Selectable thermostop ensures optimum rinse temperatures
- Fully double skinned minimising both acoustic output and reduced heat loss
- Patented dual flow wash pump with soft start – reducing power consumption whilst retaining wash efficiency
- Full door seal and door ajar facility
- Moulded wash tank for easy cleaning
- Moulded rack guide
- Accurate detergent & rinse aid peristaltic dosing pumps as standard
- Surface scrap tray filter supplied as standard



Supplied with one pegged (capable of holding 18 10" plates), one open rack (capable of holding 25 pint glasses) and cutlery insert.

Additional racks can be purchased at point of order:

Z972001 & **Z972003**



For additional information contact our Sales Team on

T: **0345 130 8070** E: **sales@maidaid-halcyon.co.uk** or visit **www.maidaid.co.uk**

D Range

undercounter

DISHWASHER

D525 ws



Technical Data

| | | |
|--------------------------|---------|---------------------------|
| Dimensions (W x D x H) | mm | 600 x 630 x 810 + Feet |
| Feet height | mm | 10-20 |
| Rack size | mm | 500 x 500 |
| Maximum useable height | mm | 365 |
| Door opening | mm | 390 |
| Theoretical productivity | Racks/h | 40 |
| Effective productivity | Racks/h | 30* |


| | | |
|-------------------|----|------|
| Wash tank element | kW | 2.1 |
| Boiler element | kW | 6 |
| Wash pump | kW | 0.47 |
| Tank capacity | L | 15 |
| Noise emission | dB | ≤ 55 |

Packaging Specs

| | | |
|------------------|----|-----------------|
| Gross weight | Kg | 66 |
| Cubic volume | m³ | 0.45 |
| Dim. (W x D x H) | mm | 670 x 690 x 980 |

*Allowing 30 seconds for reloading
Cycle times may vary depending on local conditions/services

Installation Diagram – All services must be within 1 meter

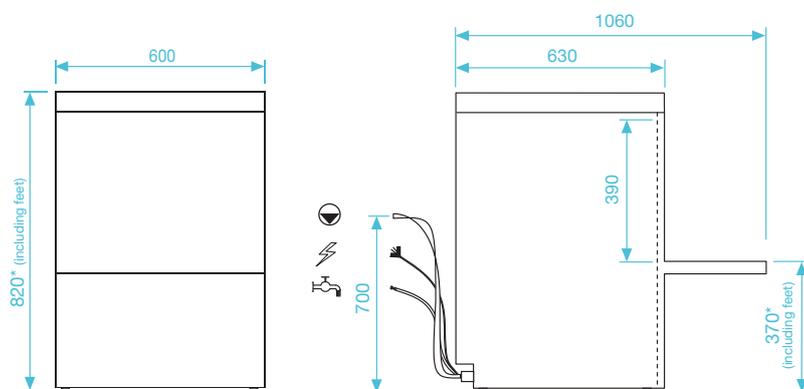

*Height-adjustable feet + 10mm

Power Supply

| | | |
|-------------------------|------------------|-----|
| Installed power | AMP | kW |
| 230V – 50Hz – 1N | 13 | 2.6 |
| | 20 | 4.5 |
| | 30* | 6.5 |
| Optional 3 Phase config | Total load 6.5kW | |
| Fused | 16 amp | |

*Standard configuration

 Pumped waste into upstand, maximum height 700mm

 Power
 Water supply 2 – 4 bar

Water Connection

| | | |
|----------------------|-------|---------------|
| Inlet water pressure | Bar | 2 to 4 |
| Flow rate L/Min | L/Min | 6 |
| Water inlet temp | °C | 10 to 50 |
| Water connection | BSP | ¾" |
| Waste connection | Ø | Int 19/ext 24 |

Cycle Information

| | | |
|-----------------------------|-----|---------------------------|
| Number of standard cycles | | 3 |
| Standard cycles times | Sec | 90/120/150 – adjustable |
| Special cycle | | Eco, Glass, Long, Refresh |
| Self-cleaning cycle | | Full self clean |
| Water consumption per cycle | L | 2 |
| Wash temperature | °C | 60 – adjustable |
| Rinse temperature | °C | 82 – adjustable |

For additional information contact our Sales Team on

T: **0345 130 8070** E: **sales@maidaïd-halcyon.co.uk** or visit **www.maidaïd.co.uk**